From: Brett Latta
To: Elaine McCloskey
Cc: R Thomas Homan
Subject: Public Comment - 9 May 2022
Date: Monday, May 9, 2022 2:54:15 PM

Caution! This message was sent from outside your organization.

A big "thank you!" to Police Chief Pijanowski for his multiple decades of public service to the city.

Best wishes,

Brett Latta
376 North Sandusky St.

EST 1808
CITY OF
DELAWARE
OHIO

To: Parking and Safety Committee
From: Bruce Pijanowski, Chief of Police
Natalia Harris, City Attorney
Amelia Bean-Deflumer, Chief Prosecutor
Re: Permitted street uses
Date: June 21, 2021

The city occasionally receives inquiries from individual owners and business ventures about the possibility of permitting the use of under- speed vehicles and electric powered devices (such as Onewheel or scooters) on public streets in the City of Delaware. While each has a slightly different appeal, the reality of each is that there are significant safety hazards to the operators of these devices when used on a public roadway. For that reason, it is my recommendation that the current restriction against low speed and under-speed vehicles, or other non-vehicular methods of transportation should not be modified.

Commented [BP1]: Should we consider positive language?

The Delaware Codified Ordinance speaks to these issues in a handful of areas. 311.03 D.C.O. states that no person shall occupy any street or roadway intended for vehicular travel for purposes other than crossing or as permitted in 371.05 D.C.O., which addresses walking in the street. This section effectively makes it illegal to use anything other than a motor vehicle on a city street, with a few other exceptions. Electric personal assistive mobility devices are permitted (371.13 D.C.O.), as are bicycles (Chapter 373), as well as jogging and running.

State law is similar, except for a provision for under-speed vehicles (golf carts) which gives local authority the ability to authorize the operation of under-speed or utility vehicles on public streets (4511.215 O.R.C.). With the passage of a local ordinance that would permit under-speed vehicles, there would be additional requirements (found in 4513.02 O.R.C.) for legal operation to occur along with a requirement that the vehicle owner submit the vehicle to an inspection conducted by local law enforcement that complies with the O.R.C. Conducting safety inspections on golf carts is not a function that I would prefer to undertake.

Research indicates that that operation of golf carts on public roads can lead to more serious injuries in minor traffic crashes. Golf carts are not subject to the rigorous crash safety standards of passenger cars, primarily because they are designed to travel at speeds less than 20 MPH on golf courses. There are no design standards that protect drivers and occupants. The image to the right of a 2014 crash test shows the damage that can occur in relatively low speed crashes (Watch the video here: https://tinyurl.com/13fd1x1l .) The steering column is pushed up into the driver's chest, the front dash is pushed into the driver's legs, the arms are flying out of the passenger compartment and the head is unrestrained. While the speed of the test is 50 km/h (approx. 31 MPH)



this is representative of what a crash on a 25 MPH street might be with a vehicle traveling the speed limit and the golf cart at 10 MPH, a conservative scenario, for a closing speed of 35 MPH. Compounding the lack of safety features is the disparate mass ratio in favor of the motor vehicle that produces a much more severe impact for the golf cart.

Under the current Delaware Codified Ordinances, OneWheels and similar devices fit under the definitions of both 'motor vehicle' under 301.20[1] and 'vehicle' under 301.51[2]. These devices are therefore not expressly prohibited by the Delaware Codified Ordinances. They are, however, not allowed on streets due to section 335.09, which requires the owner or operator of a motor vehicle to "properly display in plain view on the front and rear...the distinctive number and registration mark...furnished by the Ohio Director of Public Safety. Because OneWheels and similar devices cannot be registered in Ohio, they cannot display license plates and are therefore not permitted under the Delaware Codified Ordinances.

A Delaware resident has proposed that we amend section 371.13 of the Ordinances to allow these devices to qualify as electric personal assistive mobility devices. This would allow them to be operated on the "public streets, highways, sidewalks, and paths and portions of roadways set aside for the exclusive use of bicycles." This would also allow for the City to regulate the use of these devices by establishing rules such as age limits and equipment requirements.

Surrounding localities are split on whether to allow these devices on the roads or not. The Governor signed a bill establishing a definition and regulations for "low-speed micro mobility devices" under the Ohio Revised Code. These devices are defined as "a device weighing less than one hundred pounds, that has handlebars, is propelled by an electric motor or human power, and has an attainable speed...of not more than twenty miles per hour."[3] OneWheels would not fit this definition because they do not have handlebars. However, it shows a movement toward allowing such devices at the State level. At the local level, Cincinnati allows motorized bicycles and e-scooters, but does not address OneWheel devices.[4] Cleveland has adopted a wider approach, allowing "mobility devices" to be operated on certain roads, while establishing speed limits. These "mobility devices" would include OneWheels and similar devices.[5] Columbus has followed a similar approach as Cleveland, allowing for a broad and adaptable definition of "mobility devices" to include "similar device as determined by the Director of Public Service."[6] Upper Arlington is similar to Cincinnati in that they allow electronic scooters to be driving on roads, but do not address single wheeled devices, such as the OneWheel.[7] It appears that these single wheeled devices may be so new that most jurisdictions have not had to deal with them yet and they have not been contemplated by many localities.

Like the golf cart, the same physics hold true for an operator of an electric scooter, Onewheel or similar device. These devices are typically small have one or two wheels in line and are naturally more unstable

---

[1] "Motor vehicle" means every vehicle propelled or drawn by power other than muscular power…"
[2] "Vehicle" means every device, including a motorized bicycle, in, upon or by which any person or property may be transported or drawn upon a street or highway…"
[3] https://bit.ly/35GjsdR
[4] Cincinnati Code of Ordinances Sec. 501-1-E3 and 506.4.
[5] Cleveland Ordinances Sec. 401.231 and 473.02.
[6] Columbus City Code Sec. 2101.195.
[7] Upper Arlington Codified Ordinances 301.02.

than a four-wheeled motor vehicle. One roadway obstruction or moment of inattention could result in the device and the rider darting or falling into traffic. Additionally, the top speed of these devices is around 20 mph[8], so they would be traveling at speeds much lower than the rest of traffic on many roads. This would increase the likelihood of traffic conflict, increasing the risk of an accident, which could have dire effects on the riders of these devices. They do not compare to bikes in that their initial design was intended for their use in recreation, not transportation. In fact, the OneWheel patent specifically refers to it as a motorized skateboard. These concerns, the lack of any structure to offer protection to the rider, plus the reality that most riders do not wear protective equipment creates an untenable safety concern.

The appeal of under-speed and low-speed vehicles on city streets is understandable. They are efficient and cheap to operate and they provide alternatives that are ecologically sound. Unfortunately, their design, specifically the lack of safety features, makes them far better suited for their intended use in low risk, controlled environments away from vehicular traffic. The safety concerns presented outweigh the convenience and quality of life factors and for that reason it recommended that current law remain as is, and that these devices should not be permitted on city streets.

Commented [BP2]: Or prohibit...

[8] Onewheel.com

CITY OF
POWELL POLICE DEPARTMENT
HONESTY • INTEGRITY • DEPENDABILITY

Under-speed Vehicle, Low-speed Vehicle, Utility Vehicle, Mini-Truck Information Packet

Chapters 4511.214 and 4511.215 of the Ohio Revised Code allow for the City of Powell to grant motorists the authority to operate under-speed, low-speed, utility and mini-truck vehicles on roadways within the city limits. This information packet will outline the steps you must take in order to have your vehicle certified to operate on public roadways.

Definitions:

"Under-speed vehicle" means a three- or four-wheeled vehicle, including a vehicle commonly known as a golf cart, with an attainable speed on a paved level surface of not more than twenty miles per hour and with a gross vehicle weight rating less than three thousand pounds

"Low-speed vehicle" means a three- or four-wheeled motor vehicle with an attainable speed in one mile on a paved level surface of more than twenty miles per hour but not more than twenty-five miles per hour and with a gross vehicle weight rating less than three thousand pounds.

"Mini-truck" means a vehicle that has four wheels, is propelled by an electric motor with a rated power of seven thousand five hundred watts or less or an internal combustion engine with a piston displacement capacity of six hundred sixty cubic centimeters or less, has a total dry weight of nine hundred to two thousand two hundred pounds, contains an enclosed cabin and a seat for the vehicle operator, resembles a pickup truck or van with a cargo area or bed located at the rear of the vehicle, and was not originally manufactured to meet federal motor vehicle safety standards.

"Utility vehicle" means a self-propelled vehicle designed with a bed, principally for the purpose of transporting material or cargo in connection with construction, agricultural, forestry, grounds maintenance, lawn and garden, materials handling, or similar activities.

Included in this information packet is a copy of the Powell Police Department's Inspection Certificate for under-speed, low-speed, utility and mini-truck vehicles so you can make sure your vehicle meets the requirements before scheduling your inspection.

Here are the steps you will need to complete in order to certify your vehicle for operation on public roadways:

1. In order to have your vehicle properly inspected, you will need to contact the Powell Police Department to arrange for an officer to come to your location for the inspection. Powell Police Department: (614)-885-3374

2. An officer with the Powell Police Department will contact you to schedule a time to have your vehicle inspected. This is first step in legalizing your vehicle for operation on a roadway. **(Written documentation showing State Minimum Liability Insurance coverage on the under-speed or low-speed vehicle must be shown at the time of the inspection.)** Once all inspection requirements have been met, you will be given an Inspection Certificate to take to the Title Office in Delaware County.

3. Next, you will take your Inspection Certificate, Proof of Insurance and Proof of Ownership to the Title Office. Once they have verified that everything is in order, they will issue you a Certificate of Title.

4. Finally you will need to take the above items to a Deputy Registrar where they will verify you have completed the above steps and then you will be issued the license plates for your under-speed or low-speed vehicle.

Operation of your under-speed or low-speed vehicle must be in accordance ALL motor vehicle laws located within the Ohio Revised Code including having a valid operator's license. <u>This includes not operating the vehicle on any roadway where the posted</u> <u>speed limit is greater than 35 MPH</u>. (ORC 4511.214)

The following are excerpts from the Ohio Revised Code of the requirements that must be met in order for your under-speed or low-speed vehicle to be operated on the roadways in the City of Powell.

- **ORC 4503.21:** No person who is the owner or operator of a motor vehicle shall fail to display in plain view on the front and rear of the motor vehicle the distinctive number and registration mark, including any county identification sticker and any validation sticker issued under sections 4503.19 and 4503.191 of the Revised Code, furnished by the director of public safety.
- **ORC 4507.02:** No person shall permit the operation of a motor vehicle upon any public or private property used by the public for purposes of vehicular travel or parking knowing the operator does not have a valid driver's license issued to the operator by the registrar of motor vehicles under this chapter or a valid commercial driver's license issued under Chapter 4506 of the Revised Code.
- **ORC 4509.101:** No person shall operate, or permit the operation of, a motor vehicle in this state, unless proof of financial responsibility is maintained continuously throughout the registration period with respect to that vehicle, or, in the case of a driver who is not the owner, with respect to that driver's operation of that vehicle.
- **ORC 4511.214:** No person shall operate a low-speed vehicle upon any street or highway having an established speed limit greater than thirty-five miles per hour.

This does not preclude you from merely crossing an intersection with a roadway where the speed limit is greater than 35 MPH.

- **ORC 4513.05:** Every motor vehicle shall be equipped with at least one tail light mounted on the rear which, when lighted, shall emit a red light visible from a distance of five hundred feet to the rear. Either a tail light or a separate light shall be so constructed and placed as to illuminate with a white light the rear registration plate and render it legible from a distance of fifty feet to the rear.
- **ORC 4513.06:** Every motor vehicle shall carry at the rear, either as a part of the tail lamps or separately, two red reflectors of such size and characteristics and so maintained as to be visible at night from all distances within three hundred feet to fifty feet from such vehicle.
- **ORC 4513.071:** Every motor vehicle shall be equipped with two or more stop lights which shall be mounted on the rear of the vehicle, actuated upon application of the service brake, and may be incorporated with other rear lights. Such stop lights when actuated shall emit a red light visible from a distance of five hundred feet to the rear
- **ORC 4513.16:** Any motor vehicle may be operated under the conditions specified in section 4513.03 of the Revised Code when it is equipped with two lighted lights upon the front thereof capable of revealing persons and substantial objects seventy-five feet ahead, in lieu of lights required in section 4513.14 of the Revised Code, provided that such vehicle shall not be operated at a speed in excess of twenty miles per hour.
- **ORC 4513.21:** Every motor vehicle when operated upon a highway shall be equipped with a horn which is in good working order and capable of emitting sound audible, under normal conditions, from a distance of not less than two hundred feet.
- **ORC 4513.23:** Every motor vehicle shall be equipped with a mirror so located as to reflect to the operator a view of the highway to the rear of such vehicle.
- **ORC 4513.24:** No person shall drive any motor vehicle on a street or highway in this state that is not equipped with a windshield.
- **ORC 4513.261:** No person shall operate any motor vehicle unless the vehicle is equipped with electrical or mechanical directional signals.

CITY OF

POWELL POLICE DEPARTMENT

HONESTY • INTEGRITY • DEPENDABILITY

Under-speed, Low-speed, Utility, Mini-Truck Vehicle Inspection Certificate

Name				**Phone Number**		**Date**
Address				**City**	**State**	**Zip Code**
Year	**Make**	**Model**	**Color**	**VIN** **SERIAL NUMBER**		

YES	NO	Requires a valid driver's license for ANY operation of a MOTOR VEHICLE on public or private property.	Ohio Revised Code 4507.02(A)(1)
YES	NO	Must show proof of insurance listing State Minimum Requirements for Liability Insurance for said Golf Cart.	Ohio Revised Code 4509.101(A)(1)
YES	NO	Must be equipped with a minimum of one tail light, visible from a distance of 500 feet.	Ohio Revised Code 4513.05
YES	NO	Must be equipped with two red reflectors. (May be incorporated into other rear lights.)	Ohio Revised Code 4513.06
YES	NO	Must have a light to illuminate the rear license plate & make the plate legible from a distance of 50 feet.	Ohio Revised Code 4513.05
YES	NO	Must be equipped with two brake lights, visible from a distance of 500 feet. (May be incorporated into other rear lights.)	Ohio Revised Code 4513.071
YES	NO	Must have two working headlights capable of illuminating persons or objects at a distance of at least 75 feet.	Ohio Revised Code 4513.16
YES	NO	Must have a working horn, audible from not less than 200 feet.	Ohio Revised Code 4513.21
YES	NO	Must have a rear view mirror.	Ohio Revised Code 4513.23
YES	NO	Must have a windshield. (glass or safety glass)	Ohio Revised Code 4513.24
YES	NO	Must have working directional (turn) signals.	Ohio Revised Code 4513.261
YES	NO	Must have brackets for mounting two license plates. (front & rear)	Ohio Revised Code 4503.21

Officer's Signature/Badge #	**Applicant's Signature**

FOR DEPARTMENTAL USE ONLY

AUTHENTICATED,
OHIO LEGISLATIVE SERVICE
COMMISSION
DOCUMENT #233418

Ohio Revised Code

Section 4511.214 Operation of low-speed, under-speed, or utility vehicle, or a mini-truck.

Effective: January 1, 2017
Legislation: Senate Bill 114 - 129th General Assembly

(A)(1) No person shall operate a low-speed vehicle upon any street or highway having an established speed limit greater than thirty-five miles per hour.

(2) No person shall operate an under-speed or utility vehicle or a mini-truck upon any street or highway except as follows:

(a) Upon a street or highway having an established speed limit not greater than thirty-five miles per hour and only upon such streets or highways where a local authority has granted permission for such operation in accordance with section 4511.215 of the Revised Code;

(b) A state park or political subdivision employee or volunteer operating a utility vehicle exclusively within the boundaries of state parks or political subdivision parks for the operation or maintenance of state or political subdivision park facilities.

(3) No person shall operate a motor-driven cycle or motor scooter upon any street or highway having an established speed limit greater than forty-five miles per hour.

(B) This section does not prohibit either of the following:

(1) A person operating a low-speed vehicle, under-speed, or utility vehicle or a mini-truck from proceeding across an intersection of a street or highway having a speed limit greater than thirty-five miles per hour;

(2) A person operating a motor-driven cycle or motor scooter from proceeding across an intersection of a street or highway having a speed limit greater than forty-five miles per hour.

(C) Nothing in this section shall prevent a local authority from adopting more stringent local

ordinances, resolutions, or regulations governing the operation of a low-speed vehicle or a mini-truck, or a motor-driven cycle or motor scooter.

(D) Except as otherwise provided in this division, whoever violates division (A) of this section is guilty of a minor misdemeanor. If within one year of the offense, the offender previously has been convicted of or pleaded guilty to one predicate motor vehicle or traffic offense, whoever violates this section is guilty of a misdemeanor of the fourth degree. If within one year of the offense, the offender previously has been convicted of two or more predicate motor vehicle or traffic offenses, whoever violates this section is guilty of a misdemeanor of the third degree.

CHAPTER 376

Operation Restricted for Low-Speed and Under-Speed Vehicles

376.01 Definitions.

376.02 Restrictions.

376.01 DEFINITIONS.

For the purpose of this chapter, the following definitions shall apply unless the context clearly indicates or requires a different meaning:

(1) "Low-speed vehicle" is a three- or four-wheel motor vehicle with an attainable speed in one mile on a paved level surface of more than 20 miles per hour but not more than 25 miles per hour and with a gross vehicle weight rating less than 3,000 pounds.

(2) "Under-speed vehicle" is a three- or four-wheel vehicle, including a vehicle commonly known as a golf cart, with an attainable speed on a paved level surface of not more than 20 miles per hour and with a gross vehicle weight rating less than 3,000 pounds.

(3) "Street" or "highway" have the same meanings as in R.C. § 4511.01.

(4) “Sidewalk” has the same meaning as in Section 301.37.

(5) “Shared-Use Path” has the same meaning as in Section 301.361.

(Ord. C46-19. Passed 10-21-19; Ord. C28-20. Passed 7-20-20.)

376.02 RESTRICTIONS.

(a) No person shall operate a low-speed or under-speed vehicle upon any street or highway having an established speed limit greater than 35 miles per hour.

(b) No person shall operate a low-speed or under-speed vehicle upon the following streets:

(1) Broadway

(2) Stringtown Road

(3) London-Groveport Road

(c) No person shall operate a low-speed or under-speed vehicle upon any street or highway without a valid driver's license and proof of financial responsibility in amounts equal to the requirements under R.C. §4509.01(K).

(d) No person shall operate a low-speed or under-speed vehicle upon any street or highway with a speed limit of 35 miles per hour or lower, unless in compliance with the following provisions:

(1) The low-speed or under-speed vehicle shall be inspected by the Grove City Division of Police or other law enforcement agency that complies with inspection requirements established by the Department of Public Safety under R.C. § 4513.02 and listed below in division (e);

(2) The vehicle must successfully pass the required vehicle inspection, be registered in accordance with R.C. Chapter 4503, and be titled in accordance with R.C. Chapter 4505.

(e) In order to pass the inspection required under division (d)(1), the low-speed or under-speed vehicle must include the following equipment:

(1) Adequate brakes and braking system;

(2) Properly working brake lights, head lights, tail lights, and turn signals;

(3) A properly working steering mechanism;

(4) A windshield to prohibit injury from roadway debris;

(5) A rearview mirror;

(6) A working horn, audible from not less than 200 feet;

(7) Front and rear license plates and a license plate light to make the rear plate legible from a distance of 50 feet; and

(8) Seatbelts for the driver and all passengers.

(f) Following inspection, the low-speed or under-speed vehicle shall maintain compliance with all of the equipment set forth in division (e).

(g) This section does not prohibit a person operating a low-speed or under-speed vehicle from proceeding across an intersection of a street or highway having a speed limit greater than 35 miles per hour or the streets listed in division (b).

(h) No person shall operate a low- speed or under-speed vehicle upon any sidewalk or shared-use path.

(i) Except as otherwise provided in this division, whoever violates division (a), (b), (c), (d), (f), or (h) of this section is guilty of a minor misdemeanor. If within one year of the offense, the offender previously has been convicted of or pleaded guilty to one predicate motor vehicle or traffic offense, whoever violates this section is guilty of a misdemeanor of the fourth degree. If within one year of the offense, the offender previously has been convicted of two or more predicate motor vehicle or traffic offenses, whoever violates this section is guilty of a misdemeanor of the third degree.

(Ord. C46-19. Passed 10-21-19; Ord. C28-20. Passed 7-20-20.)

POSTED ON AUGUST 7, 2021 BY GALION INQUIRER

Ordinance allows 'low-speed vehicles' on city streets

NEWS

Golf carts, mini-trucks, small utility vehicles included in legislation

By Andrew Carter - acarter@aimmediamidwest.com

photo

GALION — Galion City Council has approved an ordinance that allows slow-moving vehicles like golf carts to operate on city streets.

Ordinance No. 2021-60 authorizes "the operation of low-speed vehicles, under-speed vehicles, utility vehicles, and mini-trucks" within the city's jurisdiction. The local legislation aligns with Ohio Revised Code 4511.215 which was approved by the Ohio General Assembly in 2017.

Mayor Tom O'Leary said the ordinance is the result of questions raised by community residents about the operation of such vehicles on city streets.

Following are the definitions for each classification of vehicle included in the ordinance:

• Low-speed vehicles — a three- or four-wheeled vehicle with an attainable speed in one mile on a paved level surface of more than 20 miles an hour but not more than 25 miles an hour and with a gross vehicle weight rating less than 3,000 pounds.

• Under-speed vehicle — a three- or four-wheeled vehicle, including golf carts, with an attainable speed on a paved level surface of not more than 20 miles per hour and with a gross weight rating less than 3,000 pounds.

• Utility vehicle — a self-propelled vehicle designed with a bed, principally for the purpose of transporting material or cargo in connection with construction, agricultural, forestry, grounds maintenance, lawn and garden, materials handling, or similar activities.

• Mini-truck — a vehicle that has four wheels, is propelled by an electric motor with a rate power of 7,500 watts or less, or an internal combustion engine with a piston displacement capacity of 600 cubic centimeters or less, has a total dry weight of 900 to 2,200 pounds, contains an enclosed cabin and a seat for the vehicle operation, resembled a pickup truck or van with a cargo area or bed located at the rear of the vehicle, and was not originally manufactured to meet federal motor vehicle safety standards.

Per terms of ordinance, the aforementioned vehicles can only operate on city streets where the posted speed limit is 35 miles per hour or lower.

The owners of said vehicles are required to "submit the vehicle to an inspection that complies with the requirements established by the Ohio Department of Public Safety under Section 4513.02 of the Revised Code. The Galion Police Department will conduct the inspections.

Additionally, according to the ordinance's language, "each vehicle must have a safety belt installed at each designated seating position and shall be part of the safety inspection."

Golf Cart - Approved Jurisdictions

County	Law Enforcement Agency
Adams	Manchester PD
Allen	Delpho Forest PD
Ashland	Muskingum Watershed Conservatory District
Ashtabula	
Athens	Athens Co. Sheriff
Auglaize	
Belmont	Muskingum Watershed Conservatory District
Brown	Ripley PD
Butler	
Carroll	Muskingum Watershed Conservatory District
Champaign	Champaign Co. Sheriff Mechanicsburg PD
Clark	
Clermont	Williamsburg PD Village of Moscow
Clinton	Clinton Co. Sheriff Sabina PD
Columbiana	
Coshocton	Muskingum Watershed Conservatory District
Crawford	
Cuyahoga	
Darke	Arcanum PD Union City PD
Defiance	Hicksville PD
Delaware	Ashley PD Powell PD
Erie	
Fairfield	Canal Winchester PD

County	Law Enforcement Agency
Fayette	
Franklin	Dublin PD Franklin Co. Sheriff Powell PD Bexley PD Perry Twp.
Fulton	Archbold PD
Gallia	Gallipolis PD
Geauga	
Greene	Village of Yellow Springs City of Bellbrook
Guernsey	Guernsey Co. Sheriff Muskingum Watershed Conservatory District
Hamilton	
Hancock	Hancock Co. Sheriff
Hardin	Hardin Co. Sheriff
Harrison	Muskingum Watershed Conservatory District
Henry	Village of Deshler
Highland	Highland Co. Sheriff
Hocking	
Holmes	
Huron	Wakeman PD New London PD Greenwich PD
Jackson	Fairport Harbor Village PD
Jefferson	Antwert Police Dept
Knox	
Lake	Painesville PD Fairport Harbor Village PD
Lawrence	
Licking	
Logan	Russells Point PD West Liberty PD Logan Co. Sheriff

Golf Cart - Approved Jurisdictions

County	Law Enforcement Agency
Lorain	Wellington PD
	La Grange PD
	Kelleys Island PD
	Oberlin PD
	Sheffield Village PD
	Ft. Loramie PD
Lucas	Toledo PD
Madison	W. Jefferson PD
Mahoning	Village of Sebring PD
Marion	Marion Co. Sheriff
Medina	Chippewa Lake
	Seville PD
Meigs	
Mercer	Ft. Recovery PD
	Cridersville PD
Miami	
Monroe	
Montgomery	
Morgan	
Morrow	
Muskingum	Muskingum County PD
	Muskingum Watershed Conservatory District
Noble	Muskingum Watershed Conservatory District
Ottawa	Put-in- Bay
	Ottawa PD
Paulding	
Perry	
Pickaway	Ashville Police Dept
Pike	
Portage	
Preble	New Paris PD

County	Law Enforcement Agency
Putnam	Putnam Co. Sheriff
	Ottawa PD
	Kalida PD
	Leipsic PD
	Ottoville PD
Richland	Muskingum Watershed Conservatory District
Ross	Ross Co. Sheriff
Sandusky	Sandusky Co. Sheriff
	Fremont PD
Scioto	New Boston PD
Seneca	Bettsville PD
	Green Springs PD
	Village of Bloomville
	Attica PD
Shelby	Botkins PD
	Shelby Co. Sheriff
	Logan Co. Sheriff
Stark	Waynesburg PD
	Minerva PD
	Beach City PD
	Stark Co. Sheriff
Summit	
Trumbull	Cortland PD
Tuscarawas	Urichsville PD
	Muskingum Watershed Conservatory District
Union	Union Co. Sheriff
Van Wert	Convoy PD
Vinton	
Warren	
Washington	Matamoras PD
Wayne	Wayne Co. Sheriff
Williams	Edgerton PD
	Edon PD
	West Unity PD
	Williams Co. Sheriff
Wood	Bradner PD
	Wayne PD
Wyandot	Wyandot Co. Sheriff

(h t t p s : / / p l a c e h o l d e r . c o m / _ t r k = h b _ t i c k e t _ i d = 1 7 5 1)

Florida Living | Nocatee Blog



A to B, Gas Free: 5 Benefits of Low-Speed Electric Vehicles (https://blog.nocatee.com/a-to-b-gas-free-5-benefits-of-low-speed-electric-vehicles)

Posted by Nocatee Community (https://blog.nocatee.com/author/nocatee-community)

9/30/15 11:03 AM

Residential areas are catching up on what golf clubs figured out long ago: low-speed electric vehicles (EVs) are handy off the course, too. With a variety of EVs on the market ranging from simple golf carts to decked out EVs, homeowners are finding them useful for local errands, yard maintenance and recreation. In addition, neighborhoods and many master-planned communities (MPCs) are accommodating—and even encouraging—their residents to adopt a more eco-friendly way of getting from A to B.



Considering going electric? Here are a **few of the main benefits of adding an EV to your family garage:**

1. Save money – using an EV instead of turning on and off your family car will save more than mere pennies. Research shows (http://www.polaris.com/en-us/gem-electric-car/cost-of-ownership) that owning one costs 64 percent less (http://www.polaris.com/en-us/gem-electric-car) than owning a regular vehicle. Spend less time wondering how much you'll be spending at the gas pump each time you go—electric vehicles run on batteries that are rechargeable.

2. Help save the environment – with cars and trucks producing almost 30 percent (http://www.ucsusa.org/clean-vehicles/car-emissions-and-global-warming#.VfxVJJ3BzGc) of the U.S.'s global warming gases, less time in the car makes for a smaller carbon footprint. EVs are emission-free; simply replacing your local errands with an electric vehicle could prevent an average of over 400 grams (http://www3.epa.gov/otaq/climate/documents/420f14040a.pdf) of CO_2 emissions per mile (eliminating almost 4.5 pounds of CO_2 in a five-mile trip!).



3. Breathe clean – other than adding to a more abundant amount of fresh air with your vehicle choice, you'll be able to enjoy it, too. (http://www.huffingtonpost.com/2014/08/08/tk-ways-fresh-air-impacts_0_n_5648164.html)Fresh air (http://www.huffingtonpost.com/2014/08/08/tk-ways-fresh-air-impacts_0_n_5648164.html) has been shown to freshen up your mood and even boost your immune system, so taking rides in your open-air vehicle is good for both the body and soul.

4. Enjoy the quiet – though starting your "engine" in an EV won't give you that satisfying *vroom*, it is a good tradeoff to be able to take a peaceful ride through the park. Sneak up on squirrels or simply have a leisurely conversation to the soundtrack of nature.

5. Run errands without wear and tear on your car – many MPCs (master-planned communities) like Nocatee have an extensive EV-friendly (https://www.nocatee.com/lifestyle/electric-vehicle-paths/) trail system that allows residents to easily knock out nearby errands. In just a few minutes (without wasting gas), residents can grab milk at the supermarket (https://www.nocatee.com/town-center), snag a "pick-me-up" from the Dunkin' Donuts (//blog.nocatee.com/skinner-bros.-realty-to-bring-dunkin-donuts-and-more-retail-to-nocatee) drive-thru and be back home before the kids get home from school.



Charged up about e-rides? Here's what you need to know before buying one:

Cost – new golf carts (http://www.buyerzone.com/residential/golf-cars/ar-prices-golf-carts/)cost (http://www.buyerzone.com/residential/golf-cars/ar-prices-golf-carts/) around $5,000-7,000, but used ones in good condition can go for as little as $2,500. Higher-end EVs can cost closer to $10,000.

Battery – charge your vehicle's battery after each day of use and always check the charge level before venturing out. Batteries can collect dirt and rust, so regular (http://www.golfcartsmidwest.com/index.php?option=com_content&view=article&id=69:how-should-i-care-for-my-golf-cart-batteries&catid=18:golf-cart-faqs&Itemid=69)maintenance and cleaning (http://www.golfcartsmidwest.com/index.php?option=com_content&view=article&id=69:how-should-i-care-for-my-golf-cart-

batteries&catid=18:golf-cart-faqs&Itemid=69) of your battery is important.

Rules of the road – there is no doubt that operating an EV is easy and safe – but where can you drive? Some communities have electric vehicle paths that allow golf carts and the like to share the trails with pedestrians and cyclists. Before hitting the open road at Nocatee, contact St. Johns County (https://www.sjso.org/wp-content/uploads/2019/05/Golf-Cart-Flyers-UPDATE-5a.pdf) for local regulations and additional requirements.

Parking – park in regular spaces or get away with those tight spots that aren't technically spaces for motor vehicles. Some communities and businesses even have specific parking spots for EVs. Nocatee offers ample "EV-Only" designated parking around the community, including up-close parking spaces at Town Center and Splash Water Park. Rules still apply when it comes to handicap spots, fire hydrants, and emergency vehicle lanes.

Just like buying a car, choosing the kind of EV you want for your family depends on size, functionality and speed. Be sure to shop around and make sure the cart you choose suits your lifestyle and budget.

To learn more about new homes available in Nocatee, visit nocatee.com, (http://nocatee.com/)stop by the Nocatee Welcome Center (https://www.nocatee.com/welcome-center), or call 904-924-6863.

Topics: Nocatee Town Center (https://blog.nocatee.com/topic/nocatee-town-center), Nocatee Nature (https://blog.nocatee.com/topic/nocatee-nature), Nocatee Greenway Trails (https://blog.nocatee.com/topic/nocatee-greenway-trails), Benefits of a Master Planned Community (https://blog.nocatee.com/topic/benefits-of-a-master-planned-community), Growing Families (https://blog.nocatee.com/topic/growing-families), Empty Nesters (https://blog.nocatee.com/topic/empty-nesters), Eco-friendly (https://blog.nocatee.com/topic/eco-friendly), Electric Vehicle Paths (https://blog.nocatee.com/topic/electric-vehicle-paths)

Share The Lifestyle!

Tweet Share Like Share

Dan Knorek 1/8/2016, 11:45:11 AM

Above it says that EV drivers have to be 14 years old to drive on public streets, I thought you needed a drivers license to operate an EV in Nocatee??????? Do you need a license to operate on the paths like a bicycle?

REPLY TO *DAN KNOREK*

Nocatee Community 3/4/2016, 2:33:19 PM

Dan- We have corrected the typo. Yes, you need to be 16 years old and have a valid drivers license for operating an EV on roadways in Nocatee. Please feel free to contact the Nocatee Welcome Center by calling (904) 924-6863 for more information on the local driving regulations.

REPLY TO *NOCATEE COMMUNITY*

Warren Noon (http://www.northfloridacustomcarts.com) 3/4/2016, 1:17:38 PM

Yes you have to be a licensed driver. Feel free to call us at North Florida Custom Carts. 904 613 3068 www.northfloridacustomcarts.com See us at the Nocatee Farmers market every third saturday!!

REPLY TO *WARREN NOON*

First Name*

Last Name*

Email*

Website

Comment*

protected by reCAPTCHA
Privacy Terms

SUBMIT COMMENT

Search for Blog Posts

SEARCH

Posts by Topic


Growing Families (107) (https://blog.nocatee.com/topic/growing-families)
New Home Search (84) (https://blog.nocatee.com/topic/new-home-search)
Benefits of a Master Planned Community (79) (https://blog.nocatee.com/topic/benefits-of-a-master-planned-community)
Master Planned Community (72) (https://blog.nocatee.com/topic/master-planned-community)
Nocatee Town Center (65) (https://blog.nocatee.com/topic/nocatee-town-center)
First-time Home Buyers (63) (https://blog.nocatee.com/topic/first-time-home-buyers)
Jacksonville (55) (https://blog.nocatee.com/topic/jacksonville)
Empty Nesters (49) (https://blog.nocatee.com/topic/empty-nesters)
Nocatee Builders (47) (https://blog.nocatee.com/topic/nocatee-builders)

The PARC Group (44) (https://blog.nocatee.com/topic/the-parc-group)


see all



(https://blog.nocatee.com/cs/c/?cta_guid=c267a28b-8e7e-4dee-a9dc-96ced0ff5c3c&signature=AAH58kGeHqLypLyZDFkizSe7Jn2XCpnWvg&pageId=3394195412&placement_guid=ab9540e7-e9f6-44dc-b0e1-c516c7df2950&click=2517b632-7885-4e7f-b84d-e6b8642bc1d2&hsutk=e279cb64d048d8452061376a1766d049&canon=https%3A%2F%2Fblog.nocatee.com%2Fa-to-b-gas-free-5-benefits-of-low-speed-electric-vehicles&portal_id=256349&redirect_url=APefjpGIcfs9xgQ7sN1sRvSw1V_sUktBZiZC2DgfBOFSwI-i-8dfzP5-p1fxGHofC9XRUaaYosuNAgOn1ldkvkCnK-kFXn4_tO1dvXLcte4Xq9OzjEQtnRE&__hstc=155668260.e279cb64d048d8452061376a1766d049.1650573567745.1650573567745.1650573567745.1&__hssc=155668260.1.1650573567747&__hsfp=3post)

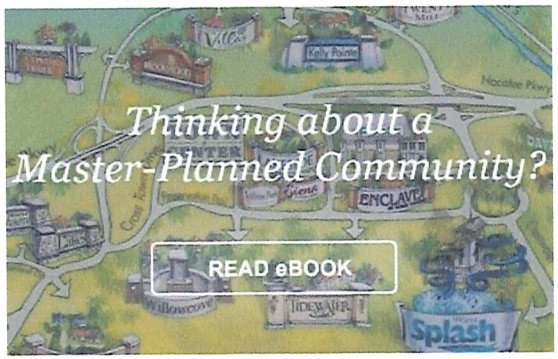

(https://blog.nocatee.com/cs/c/?cta_guid=f93abb4e-690f-41a6-8b24-8893e26768eb&signature=AAH58kG6PZJtv4jNnpFJiozO2cBrkPsZUw&pageId=3394195412&placement_guid=87a85b15-90e7-4158-aae5-58356103521c&click=cfb9cc1c-6b08-477d-9d4e-4b0da8ac92f0&hsutk=e279cb64d048d8452061376a1766d049&canon=https%3A%2F%2Fblog.nocatee.com%2Fa-to-b-gas-free-5-benefits-of-low-speed-electric-vehicles&portal_id=256349&redirect_url=APefjpGcf48zGV_ThBZ6__forrnHiOTz71_7Bd8idod_A_LT8dz7TqlDgPCPnrDwz8CKT3CiFmaD3JbeuaB1vS8xUvBxL7VRXd2t_nwB4Du2Cibic6ET-oFnJl3_1hvxjEYLJt2L2GKAH2A3a77KE2pGRZsRnBnkMQ&__hstc=155668260.e279cb64d048d8452061376a1766d049.1650573567745.1650573567745.1650573567745.1&__hssc=155668260.1.1650post)

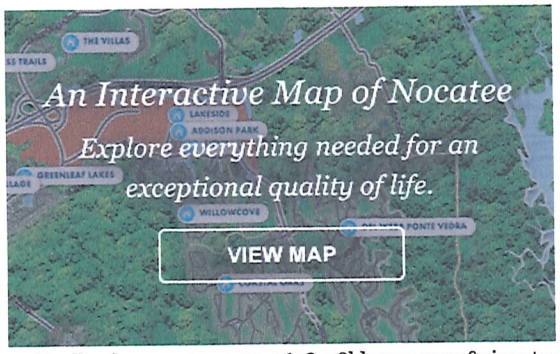

(https://blog.nocatee.com/cs/c/?cta_guid=db3eb4e2-ac35-4c13-96a8-58bb935a0345&signature=AAH58kFHS__yCN8s3ltubuv1IX-HG1jy7Q&pageId=3394195412&placement_guid=e77fddef-33cd-4053-8a2b-4362b5a4c8db&click=d258740a-da0d-47c1-bd6a-3386f0daaf8c&hsutk=e279cb64d048d8452061376a1766d049&canon=https%3A%2F%2Fblog.nocatee.com%2Fa-to-b-gas-free-5-benefits-of-low-speed-electric-vehicles&portal_id=256349&redirect_url=APefjpHBqo6Aw5pJ3BIkPFmZDnI_SnfgmrCMuGo2-orL_i5EKtRCTzizThvoY1kSAxusKFzkx5Pr2EQ_syYvjSIWG-PjUeu4txaTzCNQo7fnfdPwZNS5koU&__hstc=155668260.e279cb64d048d8452061376a1766d049.1650573567745.1650573567745.1650573567745.1&__hssc=155668260.1.1650573567747&__hsfp=3post)

Trending Posts

Beat the Heat with (Air Conditioned) Summer-time Fun (https://blog.nocatee.com/beat-the-heat-with-air-conditioned-summertime-fun)
7 Cures for the Summer-time Moves (https://blog.nocatee.com/7-cures-for-the-summer-time-moves)
New Ways To Keep The Kids Entertained (https://blog.nocatee.com/new-ways-to-keep-the-kids-entertained)
Fun Things to Do in Nocatee While Social Distancing (https://blog.nocatee.com/fun-things-to-do-in-nocatee-while-social-distancing)
7 Tips for Getting the Most Out of THE PLAYERS Championship (https://blog.nocatee.com/7-tips-for-getting-the-most-out-of-the-players-championship)
Bring The Outdoors In With These Home Features (https://blog.nocatee.com/bring-the-outdoors-in-with-these-home-features)
What to Look for in a Low-Maintenance Residence (https://blog.nocatee.com/what-to-look-for-in-a-low-maintenance-residence)
A Guide to Nocatee-A-Glow 2019 (https://blog.nocatee.com/resident-are-ready-for-the-2019-nocatee-a-glow-christmas-party)
4 Ways Halloween at MPCs is Perfect for Boys and Ghouls (https://blog.nocatee.com/4-ways-halloween-at-mpcs-is-perfect-for-boys-and-ghouls)
How Historic St. Augustine Does Halloween (https://blog.nocatee.com/how-historic-st.-augustine-does-halloween)

Nocatee Welcome Center
245 Nocatee Center Way
Ponte Vedra, FL 32081 (http://maps.google.com/maps?q=245+Nocatee+Center+Way,+%20Ponte+Vedra,+%20FL+32081)
904.924.6863 (tel:9049246863)

PHOTO GALLERY (HTTPS://WWW.NOCATEE.COM/PHOTO-GALLERY)
TOWN CENTER (HTTPS://WWW.NOCATEE.COM/TOWN-CENTER)
RESIDENTS (HTTPS://WWW.NOCATEE.COM/RESIDENTS)
PRIVACY POLICY (HTTPS://WWW.NOCATEE.COM/PRIVACY-POLICY)

Nocatee Resident Services
(904) 924-6850 (TEL:9049246850)

(https://www.youtube.com/channel/UCPohteVedra/videos?

#NOCATEE trk=hb_vsby&utm_vc=g2d1751)

THIS DOES NOT CONSTITUTE AN OFFER TO SELL REAL ESTATE TO RESIDENTS OF ANY STATE OR JURISDICTION WHERE PROHIBITED BY LAW, OR WHERE PRIOR REGISTRATION IS REQUIRED BUT HAS NOT YET BEEN FULFILLED. VOID WHERE PROHIBITED BY LAW. EQUAL HOUSING OPPORTUNITY. BROKER PARTICIPATION WELCOME.

© 2022 The PARC Group Inc.

NIH Public Access
Author Manuscript
J Trauma. Author manuscript; available in PMC 2014 May 06.

Published in final edited form as:
J Trauma. 2011 July ; 71(1): 217–222. doi:10.1097/TA.0b013e318208f874.

Mopeds and Scooters: Crash Outcomes in a High Traffic State

Makesha Miggins, MD, **Lawrence Lottenberg, MD**, **Huazhi Liu, MS**, **Lyle Moldawer, PhD**, **Philip Efron, MD**, and **Darwin Ang, MD, PhD, MPH**
Department of Surgery, University of Florida, Gainesville, FL

Makesha Miggins: makesha.miggins@surgery.ufl.edu; Lawrence Lottenberg: lawrence.lottenberg@surgery.ufl.edu; Huazhi Liu: liuhz@ufl.edu; Lyle Moldawer: lyle.moldawer@surgery.ufl.edu; Philip Efron: Philip.Efron@surgery.ufl.edu; Darwin Ang: darwin.ang@surgery.ufl.edu

Abstract

Background—Moped and scooter crash outcomes in the United States were last reported over 20 years ago. These vehicles have experienced resurgence in popularity with sales that have increased up to 60% in recent years. The purpose of this study is to identify risk factors between severe and non-severe driver related injuries and to identify modifiable risk factors.

Methods—The Florida Traffic Crash Records Database (FTCRD) was used to identify all crashes involving mopeds and scooters occurring between 2002 and 2008. A total of 5,660 moped crashes were evaluated. Multivariate logistic regression was used to determine the strength of association of severe injury for each risk factor.

Results—Over 90% of drivers involved in moped or scooter crashes were uninsured. Only 17% of all drivers wore helmets. Alcohol and drug use was a significant risk factor severe and lethal crashes OR 2.09, 95% CI (1.64, 2.66). Risk factors amenable for state intervention and associated with increased severe or lethal injury were unpaved roads OR 1.57, 95% CI (1.30, 1.88); driving speeds > 20 mph OR 2.02, 95% CI (1.73, 2.36); posted speed limits >30 mph OR 1.40, 95% CI (1.22, 1.62); major roadways with 4 or more lanes OR 1.83, 95% CI (1.04, 3.21); and poor lighting conditions OR 1.69, 95% CI (1.23, 2.32).

Conclusions—These results suggest that most of the traffic infrastructure does not accommodate the safety of moped and scooter drivers. Focused interventions and further investigation into statewide traffic rules may improve moped crash outcomes.

Keywords

Moped; Scooter; crash outcomes; Florida; traffic safety; traffic infrastructure; traffic laws; roadway conditions

Introduction

Scooters and mopeds are the major modes of transportation in many European and East Asian countries. In the United States, these vehicles gained only moderate popularity as

Correspondence: Darwin Ang, MD, PhD, MPH, University of Florida College of Medicine, 1600 SW Archer Road, PO Box 100108, Gainesville, FL 32610, darwin.ang@surgery.ufl.edu, Phone: 352-273-5670, FAX: 352-273-5683.

Meetings: Florida Committee on Trauma 2009, Thirty-third Annual Shock Society Conference 2010

NIH-PA Author Manuscript
NIH-PA Author Manuscript
NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

recreational vehicles in the 1970s and 1980s among urban dwellers and adolescents. With the recent downturn in the economy and fluctuating fuel prices, Americans have renewed their interest in mopeds and scooters as a major source of transportation. Averaging between 60 and 100 miles per gallon, estimates of moped and scooter sales have increased up to 60% in recent years.[1-4]

Mopeds are defined as a single-passenger two wheeled motorized vehicle with an automatic transmission and engine displacement less than or equal to 50cc.[5-12] The moped design has since evolved to include a two passenger version, often referred to as a scooter or mini-motorcycle, with an engine displacement up to 250cc.[11] Average speeds range from 30mph for small mopeds to 60mph for large scooters.

Reports published during the 1970s and 80s highlighted mopeds as a source of crashes and severe injuries, specifically head and lower extremity, among adolescents in the United States and abroad. [5, 6, 8, 10, 11, 13, 14] Research outside the United States reports a 20 times higher risk of injury associated with traveling by moped than by car.[5] To date, there are no contemporary studies that explore the factors contributing to moped crashes occurring in the United States. Given their increasing presence on U.S. roadways and anticipating their potential for worse crash outcomes, we believe that reexamining recent crash data on these vehicles will be important. The objectives of this study are: 1) to identify risk factors between severe and non-severe moped and scooter crashes and 2) to identify potential variables amenable for injury intervention. The state of Florida was studied because of its high traffic volume.

Materials and Methods

Data

The Florida Traffic Crash Records Database (FTCRD) was used to identify all crashes involving mopeds and scooters occurring between 2002 and 2008. This database is maintained by the Florida Department of Highway Safety and Motor Vehicles Office of Management Research and Development. The FTCRD contains driver demographics and crash related information obtained from law enforcement agency reports. Missing data represented 0.5-4% of overall data. Rubin's rules for multiple imputation over ten datasets was used to complete the missing data to derive the final analysis[15]. Demographic characteristics measured included age, gender, race, insurance status, driver license classification, moped ownership status, and crash location (rural or urban).

Outcomes and Risk Factors (exposure groups)

Severe-fatal injury was the primary outcome of interest. FTCRD defines severe injury as any sign of debilitation at the scene of the crash or any injury necessitating transfer to a higher level of care. Risk factors or exposures of interest included: Presence of protective equipment (helmet, eyewear), driving speed (mph), posted speed (mph), time of day, day of the week, alcohol and/or drug use, town type (college, university associated), county type (coastal or non-coastal), roadway, road surface type and condition, lighting conditions, weather, type of shoulder, number of lanes, and highway type (divided or undivided). A

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

college town was defined as any location in which the social and economic infrastructure of the community is dependent on the presence of the educational institution. University associated cities were those that contained at least one four year institution however their economic strength included other forms of major industry. The distinction between college and university town was made to account for student density to estimate eligible and young drivers. In this study, the terms mopeds and scooters are considered synonymous because the FTCRD does not distinguish between the two vehicle types.

Statistical Analysis

For the calculation of our point estimate, logistic regression was used because the outcome of severe or fatal injury is binary. The strength of association for each risk factor to our primary outcome was determined using univariate and multivariate logistic regression. Multivariate regression was then used to adjust and match for non modifiable factors that had the potential of confounding or biasing the outcome of interest. Confounders were considered in the multivariate analysis if it was reasonable to assume or if there was published data to show that these variables had an independent effect on the exposure (risk factor) and outcome of interest. Prior to regression analysis, multicolinearity was measured between the adjusted or confounding variables. None of the confounders in this study exhibited colinearity with each other. In the final multivariate regression, age, gender, and insurance status were treated as confounders. SAS version 9.1 for PC (Statistical Analysis Systems, Cary, NC) was used for all statistical analyses.

Results

Between 2002 and 2008 there were 5,660 moped crashes in the state of Florida. Of these crashes 18% resulted in severe or fatal injury. The demographic profile of moped drivers by injury status is shown in Table 1. The majority of crashes occurred in urban locations, severe cohort 64.6% and non severe 74.3%. Among those crashes occurring in rural areas 35.4% resulted in severe injury compared to 25.7% in the non severe injury group. Ownership status varied among moped drivers, with a greater proportion of severe injury crashes occurring among those who reported owning the vehicle, 55.7%. Moped drivers predominantly possessed a noncommercial driver's license; however, 30.8% of severe injury drivers and 23% of non-severe injury drivers were unlicensed.

Comparison of sociodemographic characteristics by severe and non-severe injury status are shown in Table 2. Only 17% of drivers were wearing a safety helmet at the time of the crash. The average driving speed for severe injury crashes was 25mph compared to 20mph for non severe injury crashes. Severe injury crashes occurred in areas with an average posted speed of 35mph. Most moped crashes occurred after 4pm. The percentage of severe injury crashes (33.4%) exceeded non severe injury crashes (28.4%) between 7:01pm and 6am. With respect to day of week, type of town, county location road surface type and condition the percentage of crashes occurring in the two cohorts was similar. More moped drivers involved in severe injury crashes were driving under the influence of drugs and/ or alcohol compared to those involved in non severe injury crashes, 11.6% and 5.4%, respectively. Poor lighting conditions also had a higher frequency of severe injury. While most moped

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

crashes occurred when the weather was clear, cloudy weather resulted in more severe injury crashes. Road type was also measured. More severe moped crashes occurred in areas with unpaved curbs and divided highways. The percentage of drivers involved in severe injury crashes increased as the number of lanes on the roadway exceeded three.

The crude and adjusted odds ratios (OR) for severe injury crashes are located in Table 3. The data was adjusted and matched for age, gender, and insurance status. The use of personal protective equipment did not significantly impact crash outcomes. Driving at speeds greater than 20 mph and on roads with a posted speed greater than 30 mph was associated with severe injury crashes adjusted OR 2.02, 95% CI (0.80, 1.13) and 1.4, 95% CI (1.22, 1.62), respectively. Alcohol and/or drug use increased the chance of a severe injury crash two-fold adjusted OR 2.09, 95% CI (1.64, 2.66). Town type and county location did not contribute to injury severity; however, traveling in rural areas was associated with severe injury crashes, adjusted OR 1.55, 95% CI (1.33, 1.80). Darkness and inadequate lighting conditions are associated with an increased risk of severe injury crashes, adjusted OR 1.69, 95% CI (1.23, 2.32) and 1.29, 95% CI (1.09, 1.53). Roadway conditions contributing to severe injury crashes include type of shoulder or curb, adjusted OR 1.22, 95% CI (1.02, 1.44); unpaved roads, adjusted OR 1.57, 95% CI (1.30, 1.88); four or more lanes, adjusted OR 1.84, 95% CI (1.04, 3.21); and divided highways, adjusted OR 1.21, 95% CI (1.04, 1.40).

Discussion

The last published research on crash outcomes in the United States for mopeds and scooters was over 20 years ago. The state of Florida is an ideal location to study the current trends of crash outcomes due to its high traffic density and the popularity of these vehicles among tourists and native residents[16]. The results of this study are also timely since there has been a substantial increase of moped and scooter purchases [1-4].

The risk of severe-fatal injury moped crashes is associated with several key factors. Demographically, people involved in severe injury crashes tended to be older than those involved in non severe injury crashes. The average age for moped crashes in this study was 38 years for severe injury and 34 years for non severe injury. This differs from earlier studies that showed mopedists between the age of 15 and 20 years accounted for a disproportionate share of deaths, accidents, and injuries.[10] The higher age may suggest a change in the use of these smaller vehicles, yet it may also be influenced by an older population in Florida where the average is 40.1 years, while the average age for the United States is 36.7 years.[17] Some of these age-related effects were accounted for through matching by age when comparing various risk factors.

Nearly half of those were involved in severe non severe injury crashes did not own the moped or scooter. This is a significant finding as Florida's coastal location and popularity as a tourist attraction have contributed to the large number of moped and scooter rental facilities throughout the state. The high frequency of crashes may be due to a population of drivers who are less likely to be familiar with the vehicle operation and the local traffic pattern. It is also not clear whether many of these rental facilities require insurance. Greater

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

than 90% of moped drivers in this study were uninsured. Florida law only requires operators of vehicles with at least four wheels to purchase personal injury protection and property damage liability insurance.[4] This difference in their insurance requirements highlights one of several discrepancies in society's and government's view of two-wheeled vehicles. As mentioned earlier, previous studies have suggested that the risk of crashing mopeds and motorcycles is higher than for cars. [18, 19] Based on the increasing trend of moped and scooter purchases and the disproportionate lack of insurance coverage, states that have loose requirements for insurance coverage may need to reexamine their policies.

Florida law requires moped drivers to possess a restricted operator or non commercial driver's license. Unlicensed drivers represented the most common characteristic involved in crashes in both cohorts (Table 1). In a tourist state such as Florida, one explanation is that moped laws vary from state to state. Nearby states such as North Carolina, Virginia, and West Virginia do not require moped operators to be licensed. Another explanation is that these drivers may represent underage drivers or those with suspended or revoked licenses. Lack of a valid license is associated with a higher risks of serious injury in the motorcycles literature.[20] Florida requires a valid license to operate a moped. Among those who had severe injury in moped and scooter crashes, 31% had no license compared to 23% in the less severe injury group. A countermeasure to the overwhelming percentage of unlicensed drivers would include proof of licensure at time of purchase.

Consistent with previous motor vehicle studies abused substances and driving speed independently had the strongest association with moped crash outcomes.[18, 19, 21, 22] Tougher penalties for DUIs and public awareness organizations have contributed to the national decline in alcohol related crashes and increased DUI convictions and license revocations.[21] In a study of adult motor vehicle crash victims presenting to Carolina Medical Center in Charlotte, NC between 1995 and 2002, Christmas et al found 39% of moped drivers were DUI of alcohol, which in their population was one-and-a-half times more than motorcycle or automobile drivers. Some of these drivers represented alcohol recidivism as many of them already had their licenses suspended or revoked.[23]

The standard moped has a maximum speed of 30-35mph. Operating a moped at speeds in excess of 20mph was associated with increased odds of severe/ fatal injury, OR 2.02, 95% CI (1.73, 2.36). This is further supported by the trend of less severe injury in colleges and university towns, as the speed limit on campus is typically 20 mph or less (Table 3). Traveling in areas with a posted speed >30mph was also associated with an increased risk of severe/fatal injury, OR 1.40, 95% CI (1.22, 1.62). Areas with higher speed limits are more likely to have larger and faster vehicles, which pose a risk to the moped or scooter driver. Roadway type also influenced outcomes. Riding a moped on a road with four or more lanes was associated with an increased risk of severe injury, OR 1.83, 95% CI (1.04, 3.21). This is a risk factor that has not been previously identified, but it is consistent with the other findings based on speed and exposure to larger vehicles. Mopeds and scooters may not be designed for most of the roadways that make up traffic infrastructure in the United States.

Environmental risk factors include cloudy weather, dark lighting conditions, presence of a curb or unpaved shoulders, traveling on divided highways and in rural areas. Of these the

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

absence of street lights, unpaved shoulders, and crashes occurring in rural areas were associated with the greatest risk of severe/fatal injury. This is consistent with previous findings where rural areas have classically been associated with an increased risk of traffic fatality compared to urban areas. [24] States may decrease driver injury by improving the quality of roads and placing more street illumination.

Helmet use has long been a point of controversy for operators of two-wheeled modes of transportation. In Florida mopedists sixteen years or older are not required to wear a helmet. Motorcyclists are required to wear helmets unless they are twenty-one years or older and have insurance with a minimum medical benefit coverage of $10,000.[4] Cars which have more physical protection than either mopeds or motorcycles have laws that require seatbelt use irrespective of age. The laws are not consistent in their protection of drivers of different vehicles. Previous studies show that nonhelmeted riders have an increased risk of serious injury and poorer hospital outcomes.[4, 8, 20] Since over 80% of drivers did not use helmets, this study was likely underpowered to find any significance.

There are several limitations to this project. Moped and scooter injury are relatively uncommon compared to car or motorcycle crashes. Thus as mentioned earlier, some exposures such as helmet use may be underpowered to find significance. Another limitation is the potential for misclassification from the data collection. This data may be biased due to subjective estimates of injury severity by Florida patrol officers and an ability to link the FTCRD with hospital records. We did address missing data by performing multiple imputations. Also, the number of nonfatal or serious moped crashes during the study period is likely underestimated as all crashes are not reported to law enforcement. Finally, given the retrospective nature of this study we are unable to report cause and effect and are limited to associations. Our findings, however, are consistent with previous investigations abroad.

In summary, mopeds share some of the same risk factors for severe injury and fatal crashes as do motorcycles and cars. However, there are factors that are unique to these vehicles and amenable to intervention such as requiring certain speed limits, limiting access to major roadways, and improving lighting conditions in rural and urban areas. These results suggest that most of the traffic infrastructure does not accommodate the safety of moped and scooter drivers. It is also concerning that at least 90% of all moped and scooter drivers did not have insurance. This may represent a significant future cost burden for the state especially as more people transition to this type of transportation. Finally, the recent increase in moped sales may represent a trend or possibly a paradigm shift in the use of these vehicles and our statewide traffic safety rules and regulations should reflect these changes.

References

1. [Accessed August, 2009] Scooters buck motorcyle sales trend. Aug. 2009 http://www.motorcycle-usa.com/7/2448/Motorcycle-Article/Scooters-Buck-Motorcycle-Sales-Trend.aspx
2. Clifford, C. [Accessed August 2009] Scooter Sales skyrocket 66%. Sep 23. 2008 http://money.cnn.com/2008/09/23/pf/scooter_popularity/index.htm2009
3. Lee, J. [Accessed April 2010] As Gas Prices Soar, Scooters Grow in Popularity. New York Times. http://cityroom.blogs.nytimes.com/2008/06/02/as-gas-prices-soar-so-does-the-scooters-popularity/

NIH-PA Author Manuscript NIH-PA Author Manuscript NIH-PA Author Manuscript

4. Trotter, D. [Accessed August, 2009] Rising fuel prices and recession fears spur nationwide interest in motorcycles and scooters. Aug. 2009 http://www.spartacommercial.com/content/press.php?20080811
5. Aare M, von Holst H. Injuries from motorcycle- and moped crashes in Sweden from 1987 to 1999. Inj Control Saf Promot. Sep; 2003 10(3):131–138. [PubMed: 12861911]
6. Bostrom L, Wladis A, Nilsson B. Injured moped riders who required admission to hospital in Sweden from 1987 to 1994. Eur J Surg. 2002; 168(6):360–365. [PubMed: 12428875]
7. Goldenbeld C. Short and long term effects of moped rider training: a field experiment. Transportation Research. 2004; 7:1–16.
8. Kopjar B. Moped injuries among adolescents: a significant forgotten problem? Accid Anal Prev. Sep; 1999 31(5):473–478. [PubMed: 10440544]
9. Kosola S, Salminen P, Laine T. Heading for a fall - moped and scooter accidents from 2002 to 2007. Scand J Surg. 2009; 98(3):175–179. [PubMed: 19919924]
10. McHugh TP, Stinson EC. Moped injuries. Ann Emerg Med. Jan; 1984 13(1):35–39. [PubMed: 6689854]
11. Salatka M, Arzemanian S, Kraus JF, Anderson CL. Fatal and severe injury: scooter and moped crashes in California, 1985. Am J Public Health. Sep; 1990 80(9):1122–1124. [PubMed: 2382755]
12. vanCamp. Helmet use among adolescent motorcycle and moped riders--Rome, Italy, 1994. MMWR Morb Mortal Wkly Rep. Apr 19; 1996 45(15):311–314. [PubMed: 8602130]
13. Bantz E, Auerbach J. Leg Burns From Mopeds. Pediatrics. 1982; 70(2):304–305. [PubMed: 7099802]
14. Westman JA, Morrow G 3rd. Moped injuries in children. Pediatrics. Nov; 1984 74(5):820–822. [PubMed: 6493876]
15. Rubin, D. Multiple Imputation for Non-Response in Surveys. New York: Wiley; 1987.
16. [Accessed August 1st, 2010] National Highway Traffic Safety Administration. 2010. http://www-nrd.nhtsa.dot.gov/departments/nrd-30/ncsa/STSI/12_FL/2008/12_FL_2008.htm
17. U.S. Census Bureau. http://factfinder.census.gov/servlet/ThematicMapFramesetServlet?-geo_id=04000US12&-tm_name=ACS_2008_3YR_G00_M00625&-ds_name=ACS_2008_3YR_G00_#?324,165
18. Horswill M. A behavioral comparison between motorcyclists and a matched group of non-motorcycling car drivers: factors influencing accident risk. Accident Analysis and Prevention. 2003; 35:589–597. [PubMed: 12729822]
19. Lardelli-Claret P, Jimenez-Moleon JJ, de Dios Luna-del-Castillo J, Garcia-Martin M, Bueno-Cavanillas A, Galvez-Vargas R. Driver dependent factors and the risk of causing a collision for two wheeled motor vehicles. Inj Prev. Aug; 2005 11(4):225–231. [PubMed: 16081752]
20. Lin MR, Kraus JF. A review of risk factors and patterns of motorcycle injuries. Accid Anal Prev. Jul; 2009 41(4):710–722. [PubMed: 19540959]
21. Cummings P, Rivara FP, Olson CM, Smith KM. Changes in traffic crash mortality rates attributed to use of alcohol, or lack of a seat belt, air bag, motorcycle helmet, or bicycle helmet, United States, 1982-2001. Inj Prev. Jun; 2006 12(3):148–154. [PubMed: 16751443]
22. Matzsch T, Karlsson B. Moped and motorcycle accidents--similarities and discrepancies. J Trauma. Jun; 1986 26(6):538–543. [PubMed: 3723620]
23. [Accessed August, 2009] Trauma Surgeons Find A Significant Number of Moped Crashes Involve Intoxicated Drivers. Medical News Today. http://www.medicalnewstoday.com/articles/125301.php
24. Rakauskas ME, Ward NJ, Gerberich SG. Identification of differences between rural and urban safety cultures. Accid Anal Prev. Sep; 2009 41(5):931–937. [PubMed: 19664429]

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

Table 1
Sociodemographic Profile Between Severe and Non-severe Injured Drivers

	Severe Injury (%) (n=1019)	*Non-severe injury (%)* (n=4641)
Average Age (yrs)	38	33.8
Gender		
Male	78.5	70.6
Female	21.5	24
Unknown	0	5.4
Race		
White	70.1	60.5
Black	13.8	18.8
Hispanic	14.7	13.4
Other	1.5	3.6
Unknown	0	3.8
Insurance Status		
Insured	7.3	9.9
Uninsured	92.7	90.1
Location		
Rural	35.4	25.7
Urban	64.6	74.3
Ownership Status		
Owner	55.7	46.8
Non-owner	44.3	53.2
Driver Licenses		
Class A	2.1	2
Class B	1.3	1
Class C	1.2	1.9
Class D/ Chauffeur	4	4.5
Class E/ Operator	57.6	56.7
Class E/ Restricted operator	2.6	3.3
None	30.8	23
Unknown	0.5	7.6

Driver License Classifications

Class A: Commercial motor vehicles – trucks or truck combinations with a gross vehicle weight rating (GVWR) of 26,001 lbs or more provided towed vehicle is more than 10, 000lbs

Class B: Commercial motor vehicles- straight trucks with a GVWR of 26,001 lbs or more.

Class C: Vehicles transporting placardable amounts of hazardous materials, or vehicles designed to transport more than 15 persons including the driver. GVWR of less than 26,001 lbs

Class D/ Chauffeur: Non commercial license, equivalent to Class E license (see below) required to drive a taxi, limo or other form of transportation for hire

Class E/ Operator: Any non-commercial motor vehicles with GVWR less than 26,001 lbs, including passenger cars, 15 passenger vans including the driver, trucks or recreational vehicles and two or three wheel motor vehicles 50cc or less.

Class E/ Restricted: Any vehicles listed under Class E operated by a person 15yrs of age, or person's learning to drive

NIH-PA Author Manuscript
NIH-PA Author Manuscript
NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

Table 2
Risk Factors and their Crash Frequencies by Injury Type

	Severe Injury (%) (n=1019)	*Non-severe injury (%)* (n=4641)
Avg. Driving Speed (mph)	25	20
Avg. Posted Speed (mph)	35	30
Protective Equipment		
No Protection	80.5	74.9
Safety Helmet	17.6	17.2
Eye Protection	1.9	1.3
Unknown	0.1	6.7
Alcohol/ Drug Use		
Yes	11.6	5.4
No	88.4	94.6
Time of Day		
6:01am- 9:00am	5.3	6.1
9:01am- 12:00pm	10.4	11.1
12:01pm- 2:00pm	10.6	12.2
2:01pm- 4:00pm	14.6	15.6
4:01pm- 7:00pm	25.6	26.7
7:01pm- 11:00pm	20.3	18.5
11:01pm- 6:00am	13.1	9.9
Day of the week		
Monday	13.5	13.4
Tuesday	13.3	12.2
Wednesday	12.1	12.9
Thursday	15.4	14.7
Friday	15.4	16.9
Saturday	15.7	15.4
Sunday	14.6	14.5
Lighting conditions		
Dark (no light)	5.6	3.6
Dark (street light)	26	22.7
Dusk	3.2	4
Dawn	0.8	1
Daylight	64.5	68.8
Weather		
Cloudy	15.2	12.8
Rainy	3.8	5
Foggy	0.2	0.2
Clear	80.8	82
Town Classification		
College	2.3	4.2

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

	Severe Injury (%) (n=1019)	*Non-severe injury (%)* (n=4641)
University Associated	23.5	22.2
Other	74.3	73.6
County Location		
Coastal	89.3	88.6
Non-coastal	10.7	11.4
Roadway		
Off-roadway	85.3	84.8
On-roadway	14.7	15.2
Road surface type		
Slag/ Gravel/ Stone	4	4.3
Brick/ Block	0.1	0.6
Concrete	3.4	3.9
Dirt	1.3	1
Blacktop	91.2	90.1
Road surface condition		
Wet	6.8	8.2
Slippery	0.8	0.9
Icy	0.1	0.02
Dry	92.3	90.9
Type of Shoulder		
Curb	41.5	41.9
Paved	31.7	33.2
Unpaved	26.9	24.9
Highway type		
Divided	37.5	32.5
Undivided	62.5	67.5
Number of Lanes		
0	6.2	11.1
1	1.6	2.8
2	45.9	47.4
3	3.7	4
4	25.3	21.7
5	2.7	2.5
6	12.6	9.2
7	0.7	0.7
8	0.7	0.6
≥9	0.6	0.1

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

Table 3

Odds Ratio by Exposure Variable

	Odds Ratio	*Adjusted Odds Ratio**
Driving Speed (mph)		
>20	2.09, 95% CI (1.79, 2.42)	2.02, 95% CI (1.73, 2.36)
≤20	Reference	
Posted Speed (mph)		
>30	1.52, 95% CI (1.33, 1.74)	1.40, 95% CI (1.22, 1.62)
≤30	Reference	
Protective Equipment		
Safety Helmet	0.95, 95% CI (0.79, 1.14)	0.86, 95% CI (0.72, 1.04)
Eye Protection	1.38, 95% CI (0.82, 2.33)	1.29, 95% CI (0.76, 2.19)
No Protection	Reference	
Alcohol/ Drug Use		
Yes	2.29, 95% CI (1.81, 2.90)	2.09, 95% CI (1.64, 2.66)
No	Reference	
Time of Day		
6:01am- 4:00pm	0.95, 95% CI (0.80, 1.13)	0.90, 95% CI (0.76, 1.08)
7:01pm- 6:00am	1.19, 95% CI (1.00, 1.42)	1.19, 95% CI (0.99, 1.44)
4:01pm- 7:00pm	Reference	
Day of the week		
Monday	1.01, 95% CI (0.78, 1.30)	0.93, 95% CI (0.71, 1.21)
Tuesday	1.09 , 95% CI (0.84, 1.41)	1.05, 95% CI (0.81, 1.37)
Wednesday	0.94, 95% CI (0.72, 1.22)	0.93, 95% CI (0.71, 1.22)
Thursday	1.04, 95% CI (0.81, 1.33)	1.02, 95% CI (0.79, 1.32)
Friday	0.91, 95% CI (0.71, 1.17)	0.86, 95% CI (0.66, 1.44)
Saturday	1.02, 95% CI (0.80, 1.30)	1.01, 95% CI (0.78, 1.30)
Sunday	Reference	
Lighting conditions		
Dark (no light)	1.69, 95% CI (1.23, 2.31)	1.69, 95% CI (1.23, 2.32)
Dark (street light)	1.22, 95% CI (1.04, 1.43)	1.29, 95% CI (1.09, 1.53)
Dusk	0.84, 95% CI (0.57, 1.24)	0.98, 95% CI (0.66, 1.44)
Dawn	0.82, 95% CI (0.39, 1.75)	0.95, 95% CI (0.44, 2.04)
Daylight	Reference	
Weather		
Cloudy	1.21, 95% CI (1.00, 1.47)	1.25, 95% CI (1.02, 1.52)
Rainy	0.76, 95% CI (0.54, 1.08)	0.75, 95% CI (0.52, 1.08)
Foggy	1.03, 95% CI (0.22, 4.76)	0.97, 95% CI (0.21, 4.49)
Clear	Reference	
Town Classification		
College	0.54, 95% CI (0.35, 0.83)	0.64, 95% CI (0.41, 1.00)
University Associated	1.05, 95% CI (0.89, 1.23)	1.05, 95% CI (0.89, 1.24)

NIH-PA Author Manuscript

NIH-PA Author Manuscript

NIH-PA Author Manuscript

	Odds Ratio	*Adjusted Odds Ratio**
Other	Reference	
County Location		
Coastal	1.07, 95% CI (0.86, 1.33)	1.01, 95% CI (0.80, 1.26)
Non-coastal	Reference	
Roadway		
Off-roadway	1.04, 95% CI (0.86, 1.26)	0.96, 95% CI (0.79, 1.17)
On-roadway	Reference	
Road surface type		
Slag/ Gravel/ Stone	0.91, 95% CI (0.64, 1.29)	0.88, 95% CI (0.61, 1.25)
Brick/ Block	0.16, 95% CI (0.02, 1.19)	0.24, 95% CI (0.03, 1.79)
Concrete	0.85, 95% CI (0.59, 1.24)	0.90, 95% CI (0.61, 1.33)
Dirt	1.30, 95% CI (0.70, 2.43)	1.51, 95% CI (0.80, 2.87)
Blacktop	Reference	
Road surface condition		
Wet	0.82, 95% CI (0.63, 1.29)	0.88, 95% CI (0.62, 1.07)
Slippery	0.88, 95% CI (0.41, 1.87)	0.84, 95% CI (0.39, 1.81)
Icy	4.48, 95% CI (0.28, 71.73)	4.28, 95% CI (0.27, 69.05)
Dry	Reference	
Type of Shoulder		
Curb	1.22, 95% CI (1.04, 1.45)	1.22, 95% CI (1.02, 1.44)
Unpaved	1.57, 95% CI (1.32, 1.88)	1.57, 95% CI (1.30, 1.88)
Paved	Reference	
Highway type		
Divided	1.25, 95% CI (1.08,1.44)	1.21, 95% CI (1.04, 1.40)
Undivided	Reference	
Number of Lanes		
0	0.98, 95% CI (0.55, 1.76)	1.00, 95% CI (0.55, 1.84)
2	1.71, 95% CI (1.01, 2.91)	1.62, 95% CI (0.93, 2.82)
3	1.64, 95% CI (0.88, 3.07)	1.52, 95% CI (0.80, 2.92)
4	2.06, 95% CI (1.20, 3.52)	1.83, 95% CI (1.04, 3.21)
5	1.92, 95% CI (0.99, 3.72)	1.53, 95% CI (0.76, 3.07)
6	2.43, 95% CI (1.39, 4.23)	2.11, 95% CI (1.18, 3.77)
7	1.70, 95% CI (0.65, 4.46)	1.44, 95% CI (0.67, 5.02)
8	2.00, 95% CI (0.75, 5.32)	1.83, 95% CI (0.67, 5.02)
≥9	11.96, 95% CI (3.05, 46.95)	10.06, 95% CI (2.51, 40.27)
1	Reference	

*Adjusted by age, gender, and insurance status

South Bound S. Henry St


East Bound Wilmer St.

South Bound Sandusky St




DOT
SEAT BELT FOR AUTOMOBILES MEETS
FMVSS NO.209 NO.302 AND SAE J386
MODEL:DC-3000-0240
MFG.DATE: 2021/10/25

Portland State University

PDXScholar

TREC Final Reports

Transportation Research and Education Center (TREC)

12-2010

Impacts of Low-Speed Vehicles on Transportation Infrastructure and Safety

Katharine M. Hunter-Zaworski
Oregon State University

Linda Cornell
Oregon DOT

Follow this and additional works at: https://pdxscholar.library.pdx.edu/trec_reports

 Part of the Transportation Commons, Urban Studies Commons, and the Urban Studies and Planning Commons

Let us know how access to this document benefits you.

Recommended Citation
Hunter-Zaworski, Kate and Linda Cornell. Impacts of Low-Speed Vehicles on Transportation Infrastructure and Safety. OTREC-RR-10-19. Portland, OR: Transportation Research and Education Center (TREC), 2010. https://doi.org/10.15760/trec.61

This Report is brought to you for free and open access. It has been accepted for inclusion in TREC Final Reports by an authorized administrator of PDXScholar. Please contact us if we can make this document more accessible: pdxscholar@pdx.edu.

OTREC

OREGON TRANSPORTATION RESEARCH AND EDUCATION CONSORTIUM

FINAL REPORT

Impacts of Low-Speed Vehicles on Transportation Infrastructure and Safety

OTREC-RR-10-19
December 2010

A National University Transportation Center sponsored by the U.S. Department of Transportation's Research and Innovative Technology Administration

IMPACTS OF LOW-SPEED VEHICLES ON TRANSPORTATION INFRASTRUCTURE AND SAFETY

Final Report

OTREC RR-10-19

by
Dr. K.M. Hunter-Zaworski
School of Civil and Construction Engineering
Oregon State University

for

Oregon Transportation Research
and Education Consortium (OTREC)
P.O. Box 751
Portland, OR 97207

OTREC
OREGON TRANSPORTATION RESEARCH AND EDUCATION CONSORTIUM

December 2010

Technical Report Documentation Page

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.
OTREC RR-10-19		

4. Title and Subtitle	5. Report Date
Impacts of low speed vehicles on transportation infrastructure and safety	December 2010
	6. Performing Organization Code

7. Author(s)	8. Performing Organization Report No.
Dr. K. H. Hunter –Zaworski, Lyn Cornell, and Mafruhatul Jannat	

9. Performing Organization Name and Address	10. Work Unit No. (TRAIS)
Oregon State University School of Civil and Construction Engineering Owen Hall 220 Corvallis, OR 97331	11. Contract or Grant No.

12. Sponsoring Agency Name and Address	13. Type of Report and Period Covered
Oregon Transportation Research and Education Consortium (OTREC) P.O. Box 751 Portland, Oregon 97207	Final Report
	14. Sponsoring Agency Code

15. Supplementary Notes

16. Abstract

There are increasing numbers of low-speed electric vehicles (LSVs) on public roadways. These vehicles are designed to be used within protected environments and on roadways with a maximum posted speed of 25 mph. Currently these vehicles are not subject to the same federal requirements for occupant protection as passenger cars. This research project investigated safety standards, operating regulations, and LSV manufacturer materials from sources around the world. The purpose of the research was to determine positive and negative impacts that LSVs, including Neighborhood Electric Vehicles (NEVs) and Medium Speed Electric Vehicles (MSEVs), are likely to have for the Oregon Department of Transportation (ODOT) and Oregon communities, and whether adjustments in current state regulations are needed to ensure that LSVs do not negatively impact road safety and traffic operations, or expose the LSV operators to undue risk. The U.S. and Canadian federal motor vehicle safety agencies have harmonized their regulations and stipulated the maximum operating speed of these vehicles, however state and local roadway authorities have regulated the maximum speed of roadways and intersection characteristics on which these vehicles can operate. The significant recommendations of this research are: (i)The State of Oregon regulations for LSVs should be amended such that LSVs are limited to public roadways with a maximum operating speed of 25 mph, and they are restricted to crossing higher speed roadways at four-way Stop or traffic controlled intersections,

(ii) local transportation authorities should develop parallel or secondary low-speed transportation networks that connect residential neighborhoods with major activity centers.

17. Key Words	18. Distribution Statement
LSV, NEV, MSEV, SAFETY	No restrictions. Copies available from OTREC: www.otrec.us

19. Security Classification (of this report)	20. Security Classification (of this page)	21. No. of Pages	22. Price
Unclassified	Unclassified	46	

SI* (MODERN METRIC) CONVERSION FACTORS

APPROXIMATE CONVERSIONS TO SI UNITS

Symbol	When You Know	Multiply By	To Find	Symbol
		LENGTH		
in	inches	25.4	millimeters	mm
ft	feet	0.305	meters	m
yd	yards	0.914	meters	m
mi	miles	1.61	kilometers	km
		AREA		
in^2	square inches	645.2	millimeters squared	mm^2
ft^2	square feet	0.093	meters squared	m^2
yd^2	square yards	0.836	meters squared	m^2
ac	acres	0.405	hectares	ha
mi^2	square miles	2.59	kilometers squared	km^2
		VOLUME		
fl oz	fluid ounces	29.57	milliliters	ml
gal	gallons	3.785	liters	L
ft^3	cubic feet	0.028	meters cubed	m^3
yd^3	cubic yards	0.765	meters cubed	m^3
NOTE: Volumes greater than 1000 L shall be shown in m^3.				
		MASS		
oz	ounces	28.35	grams	g
lb	pounds	0.454	kilograms	kg
T	short tons (2000 lb)	0.907	megagrams	Mg
		TEMPERATURE (exact)		
°F	Fahrenheit	(F-32)/1.8	Celsius	°C

APPROXIMATE CONVERSIONS FROM SI UNITS

Symbol	When You Know	Multiply By	To Find	Symbol
		LENGTH		
mm	millimeters	0.039	inches	in
m	meters	3.28	feet	ft
m	meters	1.09	yards	yd
km	kilometers	0.621	miles	mi
		AREA		
mm^2	millimeters squared	0.0016	square inches	in^2
m^2	meters squared	10.764	square feet	ft^2
m^2	meters squared	1.196	square yards	yd^2
ha	hectares	2.47	acres	ac
km^2	kilometers squared	0.386	square miles	mi^2
		VOLUME		
ml	milliliters	0.034	fluid ounces	fl oz
L	liters	0.264	gallons	gal
m^3	meters cubed	35.315	cubic feet	ft^3
m^3	meters cubed	1.308	cubic yards	yd^3
		MASS		
g	grams	0.035	ounces	oz
kg	kilograms	2.205	pounds	lb
Mg	megagrams	1.102	short tons (2000 lb)	T
		TEMPERATURE (exact)		
°C	Celsius	1.8C+32	Fahrenheit	°F

*SI is the symbol for the International System of Measurement

ACKNOWLEDGEMENTS

This project was funded by the Oregon Transportation Research and Education Consortium (OTREC). The authors acknowledge the support of the Oregon Department of Transportation Research Section (Lyn Cornell's time) as well as the members of the project Advisory Committee, which included the following members: Charlie Tomlinson (LSV owner and Mayor of Corvallis), Jazmin Casas (FHWA), Michele O'Leary (Program Manager for Motorcycle/Vehicle Equipment Standards at ODOT's Safety Division), and Margi Lifsey (ODOT Sustainability Program Manager).

DISCLAIMER

The contents of this report reflect the views of the authors, who are solely responsible for the facts and the accuracy of the material and information presented herein. This document is disseminated under the sponsorship of the U.S. Department of Transportation University Transportation Centers Program and the Oregon Department of Transportation in the interest of information exchange. The U.S. Government and the Oregon Department of Transportation assumes no liability for the contents or use thereof. The contents do not necessarily reflect the official views of the U.S. Government and the Oregon Department of Transportation. This report does not constitute a standard, specification, or regulation.

TABLE OF CONTENTS

1.0 EXECUTIVE SUMMARY 1

2.0 INTRODUCTION 2

2.1 PROJECT OBJECTIVES 3
2.2 DEFINITIONS 4
2.2.1 Introduction 4
2.2.2 Federal Definitions 4
2.2.3 Oregon Definitions 4

3.0 LITERATURE REVIEW 7

3.1 SUMMARY OF CURRENT OREGON LAWS AND STATUTES FOR LSVS 9
3.2 SUMMARY OF LAWS GOVERNING LSVS IN OTHER U.S. STATES 10
3.2.1 Classification based on maximum roadway speed limit 11
3.2.2 Classification based on intersection speed limit 11
3.2.3 Other State Regulations 13
3.3 FEDERAL MOTOR VEHICLE SAFETY STANDARDS: FMVSS 500 15
3.3.1 Definition 16
3.3.2 Requirements 16
3.4 DOMESTIC MANUFACTURERS 16
3.4.1 Dynasty Electric Vehicles Limited 166
3.4.2 ZENN 17
3.4.3 Frazer Nash 17
3.4.4 GEM 18
3.4.5 Miles Electric Vehicles 18
3.4.6 Columbia ParCar 19
3.4.7 ZAP 19
3.4.8 Ruff and Tuff Electric Vehicles 19
3.4.9 Ford Th!nk Neighbor 20

4.0 SAFETY CONSIDERATIONS 21

4.1 CRASH TESTING 21
4.1.1 Introduction 21
4.1.2 US and Canada Crash Tests 21
4.2 OPERATING ENVIRONMENT 23
4.2.1 Speed 23
4.2.2 Speed differential 23
4.3 VEHICLE WEIGHT 24
4.4 IMPACT RESISTANT CABS AND OTHER SAFETY EQUIPMENT 25
4.5 VULNERABILITY 26
4.5.1 Street Infrastructure 26
4.5.2 Crash Data 28

5.0 INSURANCE 29

6.0 CONCLUSIONS 31

6.1 SAFETY PARAMETERS 31
6.2 OPERATING ENVIRONMENT 32
6.3 REGULATORY AND SPEED HARMONIZATION 33
7.0 RECOMMENDATIONS 35
7.1 STATE AND LOCAL LSV REGULATIONS 35
7.2 STATE AND LOCAL PLANNING 35
7.3 CONSUMER EDUCATION 35
8.0 REFERENCES 37
9.0 APPENDIX A STATE REFERENCES 41
10.0 APPENDIX B TABLE OF MANUFACTURERS 46

1.0 EXECUTIVE SUMMARY

There are increasing numbers of low-speed electric vehicles (LSVs) on public roadways. While small electric vehicles have been in common use for many years in gated communities and on industrial and college campuses, they are becoming more common on public roadways as a short-range alternative to fossil-fueled autos. These vehicles are not classified as passenger cars, and are not subject to the same federal requirements for occupant protection as passenger cars. It is also important to note that LSVs are not in the same vehicle classification as the new all-electric passenger cars and trucks that are currently being introduced in North America. This research project investigated safety standards, operating regulations, and LSV manufacturer materials from sources around the world. The purpose of the research was to determine positive and negative impacts that LSVs, which include Neighborhood Electric Vehicles (NEVs) and Medium-Speed Electric Vehicles (MSEVs), are likely to have for the Oregon Department of Transportation (ODOT) and Oregon communities. In addition, the research explores whether adjustments in current state regulations are needed to ensure that LSVs do not negatively impact road safety and traffic operations, or expose the LSV operators to undue risk.

There were several important issues that were identified in conducting this research:

- LSVs were designed to be used in controlled or protected environments and on roadways with a maximum posted speed of 25 mph.
- The safety standards that were developed in Europe and North America were developed with the underlying premise that LSVs would be operating on low-speed roadways in protected environments. Thus the regulations pertaining to these vehicles do not have any provisions for occupant crash protection other than the use of a seat belt.
- The U.S. and Canadian federal motor vehicle safety agencies have harmonized their regulations and stipulated the maximum operating speed of these vehicles, and state and local roadway authorities have regulated the maximum speed of roadways and intersection characteristics on which these vehicles can operate.
- In North America, states, provinces and local governments have the legal authority to set regulations pertaining to motor vehicles operating on the roadways under their jurisdictions. In many circumstances, these regulations significantly increase the risk exposure to users of LSVs. In many jurisdictions throughout the world, the vehicle safety and roadway operating regulations are inconsistent.

The results of the research included three major recommendations:

- The State of Oregon's regulations for LSVs should be amended such that LSVs are limited to public roadways with a maximum operating speed of 25 mph, and they are restricted to crossing higher-speed roadways at four-way stops or traffic-controlled intersections.
- Local transportation authorities should work with LSV users and members of the bicycle community to develop parallel or secondary low-speed transportation networks that

connect residential neighborhoods with major activity centers that include education, employment, retail, medical and recreational facilities.

- LSV users need to be educated about the safety risks of LSVs, in particular those that have a "car-like" appearance, and the safety risks of modifying the speed regulator on LSVs.

2.0 INTRODUCTION

There are increasing numbers of low-speed electric vehicles on public roadways. While small electric vehicles have been in common use for many years on golf courses and as mobility aids, their manufacture for use on public roadways as a short-range alternative to fossil-fueled autos has been increasing in recent years. The U.S. Energy Information Administration estimates that the number of electric vehicles in use nationwide has increased from 6,964 in 1999 to 53,526 in 2006 – a seven-fold increase in seven years (EIA, 2007). While this number is still very small relative to the overall fleet of automobiles, it is expected to increase significantly in the coming years due to increases in fossil fuel prices and new priorities for reducing dependence on fossil fuels (i.e., developing more sustainable transportation technologies, and taking positive steps to reduce greenhouse gases).

Low-speed electric vehicles (LSVs), also referred to as Neighborhood Electric Vehicles (NEVs), are limited to a maximum speed of 25 mph. In recent years manufacturers have introduced Medium-Speed Electric Vehicles (MSEVs), which are essentially LSVs capable of faster speeds – usually 35 mph. Both NEVs and MSEVs are expected to become more popular in the coming years for local commuting and personal errands. In this report, NEVs that are limited to a maximum speed of 25 mph will be referred to as Low-Speed Vehicles (LSVs); and MSEVs will refer to NEVs that are capable of faster speeds. MSEVs are defined in Oregon regulations, but there are currently no MSEVs registered in Oregon and in many states they are prohibited. Thus this research has primarily focused on LSVs that are limited to a maximum speed of 25 mph.

As of December 31, 2009, there were 265 LSVs and no MSEVs registered in Oregon. There are other types of electric vehicles registered (such as electric motorcycles), bringing the total number of Oregon registrations to approximately 400 electric vehicles (Tucker, 2008). Given that Portland appears to have the highest per capita ownership of hybrid cars of any American city (OSPIRG, 2006), the adoption of all-electric vehicles in Oregon may also be significant in the coming years. It is important to note that LSVs are not in the same vehicle classification as all-electric passenger cars. The new all-electric passenger cars and trucks have met or exceeded the Federal Motor Vehicle Safety Standards for occupant protection, and these vehicles are not speed restricted or limited to low-speed roadways. Both LSVs and all-electric passenger cars and trucks have the potential to significantly reduce greenhouse gases.

LSVs are already in use on many college and industrial campuses and in gated communities in the major retirement communities in Florida and Arizona. In Europe and Asia, these vehicles are increasing in number as an extended mobility and independence option for seniors and people with disabilities.

As a class of motor vehicles, LSVs differ from conventional passenger cars in significant ways. Although federal motor vehicle safety standards require that they be equipped with headlights, taillights, brake lights, turn signals, seat belts and other safety features, LSVs are nonetheless smaller and lighter than conventional cars. A University of California study notes that such vehicles are typically shorter in length, width and wheelbase than the American Association of State Highway and Transportation Officials (AASHTO) design for passenger cars, and they have slower acceleration (Stein, et al., 1994). Consequently, LSVs have inherent safety risks associated with their use on public roadways and where these roadways intersect with high-speed facilities. Thus, as LSVs continue to become more numerous on public roads, the need arises to investigate the impacts of their use to ensure the safety of the traveling public.

A brief examination of other state laws shows a range of restrictions pertaining to LSVs. The basis of these state regulations, however, is not clear. With such vehicles likely to come into more common use, there is a need to investigate a rational basis for regulations that would protect the public and also provide for the use of this energy-efficient, sustainable alternative to the conventional fossil-fueled passenger car for local, short-range travel.

2.1 PROJECT OBJECTIVES

The goal of this research was to determine positive and negative impacts that LSVs, which include Neighborhood Electric Vehicles (NEVs) and Medium-Speed Electric Vehicles (MSEVs), are likely to have for the Oregon Department of Transportation (ODOT) and Oregon communities. In addition, this research explores whether adjustments in current state regulations are needed to ensure that LSVs do not negatively impact road safety and traffic operations, or expose LSV operators to undue risk. The research project investigated international and North American operating and safety practices that support the use of these vehicles. The research was considered timely, since LSVs have the potential to reduce greenhouse gas emissions and thus potentially improve the quality of community life. The objectives included the following:

1. Conduct a comprehensive review of literature on the safety of LSVs and their regulation on public roadways in the North American, European, Asian and Australian continents.
2. Obtain technical specifications from LSV manufacturers to aid in the determination of the limitations and capabilities of these vehicles, and to identify potential safety issues related to their operation on public roadways.
3. Compile and analyze laws and regulations for LSV operations in all states, particularly as they relate to minimum and maximum operating speeds.
4. Collect information from state departments of transportation (DOTs) and the U.S. Department of Transportation (USDOT) on any crash data they have collected pertaining to LSVs.
5. Identify safety and regulatory issues on roadway infrastructures by analyzing the effects and impacts of LSV operations on public roadways, given their operational characteristics relative to other types of vehicles on the road.
6. Identify connectivity issues within roadway infrastructures where there are gaps between low-speed roadway connections within urban (growth) boundaries. For example, some connectivity issues may force these vehicles to use higher-speed roadways that they are not designed for, or to use multiuse paths, which is problematic for other path users.

7. Develop recommendations for ODOT and local governments to address the safety and regulatory issues identified in the research.

The outcome of this research was a set of recommendations that provide direction for state regulators on the use of LSVs on Oregon's public roadways. In addition, the research results should assist Oregon communities in developing local safety and traffic operation ordinances for LSVs that protect all road users. This evidence-based research is timely, and it permits ODOT and Oregon communities to be proactive rather than reactive towards the increased use of LSVs as another transportation mode, improve safety and achieve Oregon's sustainability goals. The research results will be added to the multimodal data warehouse for future policy and planning use by ODOT and local agencies.

2.2 DEFINITIONS

2.2.1 Introduction

The Office of Legislative Research of the Connecticut General Assembly conducted a survey of LSV regulation in states throughout the U.S. (Fazzalaro, 2008). The report summarized federal and state regulations pertaining to LSVs, including operating speeds, roadway type and regulatory authority. LSVs are not permitted on Connecticut public roadways. The Connecticut study was reviewed and updated to reflect changes in state laws in the past two years.

2.2.2 Federal Definitions

On June 17, 1998, the National Highway Traffic Safety Administration (NHTSA) officially included low-speed vehicles as a motor vehicle category of the Federal Motor Vehicle Safety Standards and defined LSV in 49 CFR 571.3. According to the definition in this rulemaking, "Low-Speed Vehicle (LSV) is a four-wheeled motor vehicle whose attainable speed in 1 mile is more than 20 miles per hour and not more than 25 miles per hour on a paved level surface and has a gross vehicle weight rating (GVWR) of less than 3000 lbs." This group includes NEVs and speed-modified golf carts with top speeds of more than 20 mph but less than 25 mph (NHTSA, 1998).

2.2.3 Oregon Definitions

Current Oregon Revised Statutes (ORS) are consistent with 40 other states. ORS 801.331 defines a low-speed vehicle as a four-wheeled motor vehicle with a top speed of more than 20 mph but not more than 25 mph. This type of vehicle is permitted to operate on public roads posted at no more than 35 mph (ORS 811.512). Addressing the case of three-wheeled LSVs, ORS 814.518 limits the speed of three-wheeled "motorized scooters" to 25 mph. ORS 814.520 provides that these vehicles are in violation of the law if they are driven "at less than the normal speed of traffic using the roadway at that time and place."

ORS 801.341 defines a Medium-Speed Electric Vehicle (MSEV), as "an electric motor vehicle with four wheels that is equipped with a roll cage or a crushproof body design, can attain a maximum speed of 35 miles per hour on a paved, level surface, is fully enclosed, and has at least one door for entry" (ORS, 2009). The presence of a roll cage or crushproof body does not guarantee that the vehicle is crashworthy, however.

2.2.3.1 Three-wheeled vehicles

In Oregon, a three-wheeled vehicle that is not a human-powered tricycle is defined as a motorcycle (ORS 801.365). This report does not address motor-assisted scooters or three-wheeled electric vehicles; however, many of the issues discussed in this report may pertain to motor-assisted scooters. People who ride motorcycles have special licenses and many take special training in motorcycle safety. Traditional motorcycles do not experience the speed differentials that are discussed in Section 4.0, Safety Considerations.

> **Motorcycle**. A motorcycle includes any self-propelled vehicle other than a moped or farm tractor that:
>
> (1) Has a seat or saddle for use of the rider;
>
> (2) Is designed to be operated on the ground upon wheels; and
>
> (3) Is designed to travel with not more than three wheels in contact with the ground.

Figure 2.1 shown below is a flow chart to assist ODOT and law enforcement staff in identifying these special vehicles.

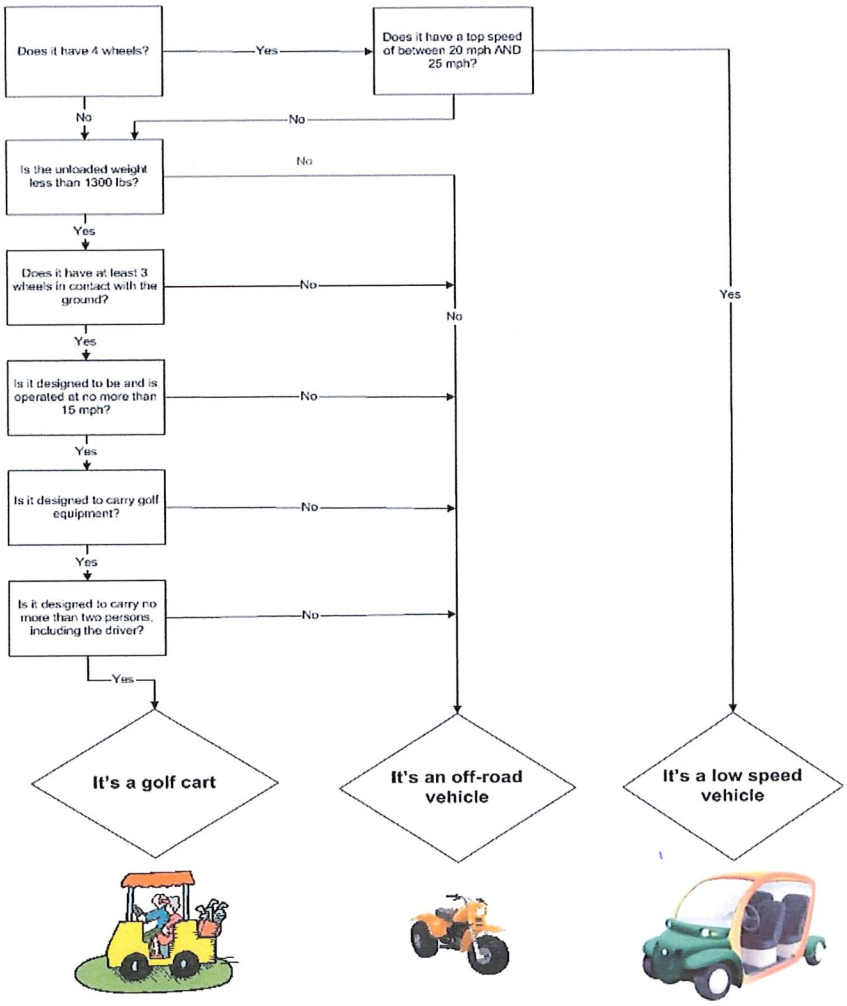


Figure 2.1: Flow chart to assist with identification of LSVs (Courtesy of Michele O'Leary , ODOT Safety Division)

3.0 LITERATURE REVIEW

Literature pertaining to "Light Electric Vehicles" from Australia, New Zealand, Europe and Canada was reviewed, and a short summary is provided below. New Zealand and Australia currently do not permit these vehicles on public roads as a result of concerns for occupant safety.

The Government of Canada's Transport Canada has worked in partnership with the United States Department of Transportation to harmonize regulations so that LSV manufacturers can build LSVs for the North American marketplace (NHTSA, 1998).

In Europe and other parts of the world, these vehicles are defined as electric or motorized quadricycles. The European definition, which has been adopted by many nations, was developed by the European Union and is eligible for European Community Whole Vehicle Type Approval (ECWVTA) (UK Department of Transport, 1999). An expansion of the definition for powered two- and three-wheel vehicles (including some quadricycles) includes vehicles that are capable of more than 6 km/h (3.75 mph), and came into effect on June 17, 1999. *"Any newly designed, mass produced, model or type of vehicle within the scope of ECWVTA and first introduced and placed on the market of an EU Member State from that date must have ECWVTA, and a Certificate of Conformity issued by the manufacturer must be made available. To be valid in the UK, the Certificate of Conformity should indicate that the vehicle is suitable for use in left hand rule of the road traffic and has a speedometer calibrated in miles per hour."* (UK Department of Transport, 1999*).*

The ECWVTA definitions are as follows:

Category L6e -	***Light quadricycle** - Four wheels, with a maximum unladen mass of 350kg (not including the mass of the batteries in an electrically powered vehicle), a maximum speed of 45km/h, a maximum spark ignition internal combustion engine capacity of 50cm^3, or maximum power of any other internal combustion engine of 4kW or maximum electric motor power of 4kW. The construction requirements are those for a three wheel moped unless otherwise specified in a particular Directive.*
Category L7e -	***Quadricycle** - Four wheels, with a maximum unladen mass of 400kg or 550kg for a goods carrying vehicle (not including the mass of the batteries in an electrically powered vehicle) and a maximum net power, whatever the type of engine or motor, of 15kW. The construction requirements are those for a motor tricycle unless otherwise specified in a particular Directive.*

Note - The Masses and Dimensions Directive, 93/93/EEC, applies controls on maximum dimensions and laden/unladen masses for vehicles" (UK Department of Transport, 1999).

Construction standards for quadricycles are harmonized at the European level, the main instrument being European Parliament and Council Directive "2002/24/EC - the Framework Directive." This Directive requires compliance with a number of individual Directives that set

out requirements for particular vehicle systems: brakes, lighting, wheels, and other components. These harmonized requirements are recognized by all 27 Member States of the European Community. Once the vehicle is approved to the standards of the Directive by any member state, the manufacturer has access to all 27 markets." (UK Department of Transport, 1999).

The UK Department of Transport issued a news release on May 8, 2007, indicating that the government was seeking a review of the European regulations for quadricycles after initial tests of their safety performance raised concern, and following their growth in popularity as a more environmentally friendly alternative to cars. Current safety standards, set at the European level, were established at a time when it was never envisaged that this type of product would be used as a mainstream road vehicle. The UK Department of Transport began simulated impact tests once this growth in popularity had been determined. The vehicle that was tested passed all the European requirements applicable to quadricyles, but when it was subjected to the same impact test expected of normal cars, serious safety issues were revealed (UK Department of Transport, 1999).

The UK Roads Minister Dr. Stephen Ladyman said: "*The safety regulations that govern this type of vehicle were designed at a time when it was thought they would cover four-wheeled motorcycles and some small, specialized commercial vehicles. Not city run-abouts that resemble small cars. But, given increasing environmental concerns, new vehicles that qualify as quadricycles have come to the market and are becoming more popular for urban use. Therefore it is right that we reconsider the regulations for this type of vehicle and whether safety regulations should be made more stringent. Now[that] we have the initial findings of our tests we will be taking this up with the European Commission and manufacturers, and will publish more information when the full programme of tests is complete. The Department for Transport is undertaking further tests on another make of quadricycle to help its discussions with the European Commission, and is now in urgent contact with the relevant manufacturers. Once the full analysis is complete further information will be made available.*" (BBC News, 2007).

The occupant protection of a quadricycle is assessed by a frontal impact test where the vehicle is propelled into a deformable barrier (to simulate striking another vehicle) at a velocity of 56 km/h (~35 mph). The impact takes place at a 40% overlap with the barrier and is concentrated on the driver's side of the vehicle. The UK department tested two quadricycles. The first test, which involved a REVA G-Wiz electric vehicle, took place in 2007 (BBC News, 2007). Currently for quadricycles and LSVs, as opposed to passenger cars, there are no requirements for occupant protection tests.

3.1 SUMMARY OF CURRENT OREGON LAWS AND STATUTES FOR LSVS

Table 3.1 Summarizes current Oregon laws and statutes for LSVs.

Table 3.1: Current Oregon Laws and Statutes for LSVs

ORS Number	TITLE	Brief Description
801.331 http://www.leg.state.or.us/ors/801.331	Low-speed vehicle	Low-speed vehicle means a four-wheeled motor vehicle with a top speed of more than 20 miles per hour but not more than 25 miles per hour.
801.341 http://www.leg.state.or.us/ors/801-341	Medium-speed electric vehicle	Medium-speed electric vehicle means an electric motor vehicle with four wheels that is equipped with a roll cage or a crushproof body design, can attain a maximum speed of 35 miles per hour on a paved, level surface, is fully enclosed, and has at least one door for entry.
803.300 http://www.leg.state.or.us/ors/803.300	Failure to register: Penalty	A person commits the offense of failure to register a vehicle if the person owns a vehicle in this state and the person does not register the vehicle in this state. This is a Class D traffic violation.
803.420 http://www.leg.state.or.us/ors/803.420	Registration fee	The registration fee for a low-speed vehicle and medium-speed vehicle is $43 for each year of the registration period.
811.512 http://www.leg.state.or.us/ors/811.512	Unlawfully operating low-speed vehicle on highway; penalty	A person commits the offense of unlawfully operating a low-speed vehicle on a highway if the person operates a low-speed vehicle on a highway that has a speed limit or posted speed of more than 35 miles per hour; it is a Class B traffic violation. However, a city or county may adopt an ordinance allowing operation of low-speed vehicles on city streets or county roads that have posted speeds of more than 35 miles per hour.
811.513	Unlawfully operating medium-speed electric	A person commits the offense of unlawfully operating a medium-

http://www.leg.state.or.us/ors/811.513	vehicle on highway; penalty	speed electric vehicle on a highway if the person operates a medium-speed electric vehicle on a highway with a posted speed limit that is greater than 45 miles per hour; it is a Class B traffic violation. However, a city or county may adopt an ordinance allowing operation of medium-speed electric vehicles on city streets or county roads that have speed limits or posted speeds of more than 45 miles per hour.
820.220 http://www.leg.state.or.us/ors/820.html	Operation of low-speed vehicle in prohibited area; penalty	A person commits the offense of operation of a low-speed vehicle in a prohibited area if the person is a person with a disability and the person operates a golf cart or substantially similar motor vehicle on any highway with a speed designation greater than 25 miles per hour; it is a Class D traffic violation.
807.010 http://www.leg.state.or.us/ors/807.html	Operating vehicle without driving privileges or in violation of license restrictions; penalty	A valid driver license is required
811.435 http://www.leg.state.or.us/ors/811.435	Operation of motor vehicle on bicycle trail	A person commits the offense of operation of a motor vehicle on a bicycle trail if the person operates a motor vehicle upon a bicycle lane or a bicycle path; it is a Class B traffic violation.
811.130 http://www.leg.state.or.us/ors/811.130	Impeding traffic; penalty	The operator may be cited for impeding traffic.

3.2 SUMMARY OF LAWS GOVERNING LSVs IN OTHER U.S. STATES

The regulations of LSVs in almost all of the states have been reviewed. All the references for this section are included in Appendix A. To date, Alabama, Arkansas and Connecticut do not have any laws permitting low-speed electric vehicles on public roadways. Nebraska has passed LSV regulations, but the detailed information of the laws could not be further located. The states that

do have regulations governing LSVs may be summarized into one of the following categories: the maximum roadway speed limit to legally operate an LSV, and the intersection speed limit that an LSV can cross.

3.2.1 Classification based on maximum roadway speed limit

3.2.1.1 States that specify a speed limit greater than the speed of an LSV

Among the 50 states, approximately 35 states have specified the maximum roadway speed limit of 35 mph for allowing an LSV, whereas the maximum operating speed of an LSV in those states is 25 mph. This creates a potential speed differential of 10 mph between LSVs and other motor vehicles. The states belonging to this group are as follows: Alaska, Arizona, California, Colorado, Delaware, Florida, Georgia, Hawaii, Idaho, Iowa, Kentucky, Louisiana, Maine, Michigan, Minnesota, Mississippi, Missouri, Nevada, New Hampshire, New Mexico, New York, North Carolina, North Dakota, Oklahoma, Oregon, South Carolina, South Dakota, Tennessee, Texas, Utah, Vermont, Virginia, Washington, Wisconsin, and Wyoming.

There are some variations. Kansas has specified the maximum roadway speed limit as 40 mph, creating a potential speed differential of 15 mph. Texas has specified that an LSV may not be operated on a street or highway at a speed that exceeds the lesser of two measures: the posted speed limit or 35 miles per hour. The maximum potential speed differential is thus 10 mph.

The states of Illinois, Maryland and Massachusetts have specified the maximum roadway speed limit as 30 mph, whereas the maximum operating speed of LSVs in those states is 25 mph, resulting in a potential speed differential of 5 mph.

3.2.1.2 States that specify a speed limit as the same as the speed of an LSV

The states of New Jersey, West Virginia and Rhode Island have restricted LSVs to roadways with the maximum speed limit of 25 mph, which is same as the maximum operating speed of an LSV. However, the New Jersey legislature has given the approval to state authority or local ordinance to increase the roadway speed limit to 35 mph if required.

Indiana and New York have specified both the roadway speed limit on which LSVs may operate and the maximum operating speed of LSVs to be 35 mph.

3.2.2 Classification based on intersection speed limit

3.2.2.1 States that allow LSVs to cross roadways with higher speed limits

Thirty states allow LSVs to cross at the intersection of roadways having higher speed limits. This group can be further divided into two categories: states that specify the type and control of the intersection, and states specifying no intersection controls.

3.2.2.2 States that specify the type of intersection

California specifies that an LSV may cross a roadway with a speed limit in excess of 35 mph if the crossing begins and ends on a roadway with a speed limit of 35 mph or less and occurs at an intersection of approximately 90 degrees. Also, the operator of an LSV may not traverse an uncontrolled intersection with any state highway unless that intersection has been approved and authorized by the agency having primary traffic enforcement responsibilities for that crossing by a low-speed vehicle.

In Illinois, LSVs may not cross a street with a speed limit in excess of 45 mph unless the crossing is at an intersection controlled by a traffic light or four-way stop sign. However, the transportation department or a municipality, township, county, or other unit of local government has the authority to prohibit the operation of LSVs on streets if public safety is jeopardized.

In Kentucky, the legislation states that LSVs may cross an at-grade intersection with a roadway having a speed greater than 35 mph if the intersection is equipped with traffic signals.

In Maryland, a person may not drive an LSV across a highway for which the posted maximum speed limit exceeds 45 mph, except at an intersection that is controlled by a traffic signal or a stop sign at each approach to the intersection.

In Massachusetts, an LSV may cross an intersection of a roadway with a posted speed limit of 45 mph if it is controlled by traffic signals or stop signs.

New Jersey legislation states that if the road is more than two lanes, divided, or has a speed limit over 35 mph, an LSV must cross only at a signalized intersection. Crossing at a non-signalized intersection can occur if approved by the state transportation agency.

In Vermont, LSVs may cross a highway that has a speed limit of up to 50 mph if the crossing begins and ends on a highway authorized for use by LSVs, and if the intersection is controlled by traffic signals.

In Wisconsin, an LSV can cross those intersections where the highway under the jurisdiction of the municipality or county crosses a major state highway or a connecting highway only if the major state highway or connecting highway has a speed limit at the intersection of 35 mph or less and is controlled by traffic signals.

In Wyoming, an LSV can cross a state highway or a roadway with a speed limit over 35 mph if the crossing begins and ends on a roadway with a speed limit of 35 mph or less, occurs at an intersection of approximately ninety (90) degrees, and the local authorities have authorized the crossing.

3.2.2.3 States with no description of intersection

The following states mention that LSVs can cross the highway with a speed limit greater than 35 mph, but they do not specify whether the intersection should be controlled or uncontrolled: Alaska, Arizona, Colorado, Delaware, Florida, Hawaii, Iowa, Louisiana, Kansas, Maine, Michigan, Minnesota, Missouri, Nevada, New Hampshire, New York, New Mexico, North Carolina, North Dakota, Oklahoma, Rhode Island, South Carolina, Tennessee, Texas, Utah, Virginia, and West Virginia.

3.2.2.4 States that specifically prohibit crossing roadways with higher speed limits

In Washington, LSVs cannot cross a highway with a posted speed limit greater than 35 mph unless the following criteria are met: " NEVs cannot cross a roadway with a speed limit in excess of thirty-five miles per hour, unless the crossing begins and ends on a roadway with a speed limit of thirty-five miles per hour or less and occurs at an intersection of approximately ninety degrees, except that the operator of a neighborhood electric vehicle must not cross an uncontrolled intersection of streets and highways that are part of the state highway system subject to Title 47 RCW unless that intersection has been authorized by local authorities provided elsewhere in this section"(Title 46 RCW).

In Idaho, LSVs are not authorized to cross any highway with a posted speed limit greater than 45 mph.

3.2.2.5 No mention of crossings

There are four states with no regulations concerning the speed limit of an intersection where LSVs may cross. These are the District of Columbia, Indiana, Oregon, and South Dakota.

3.2.3 Other State Regulations

3.2.3.1 States that include three-wheeled motor vehicles in the state definition of LSVs:

In C.R.S. 42-1-102(48.6), Colorado has defined an LSV as a self-propelled electric vehicle that has at least three wheels in contact with the ground.

3.2.3.2 Class B or Medium-Speed Electric Vehicles (MSEVs):

In 1998, a petition was made to NHTSA by Environmental Motors, Porteon Electric Vehicles, Inc., and Mirox Corporation for a rulemaking to create a new class of motor vehicles known as medium-speed vehicles, which would be limited to a maximum speed of 35 mph. A number of reasons were cited in favor of this petition, but the most significant reason was related to potential environmental benefits, including facilitating the development of electric vehicles and fuel savings. The petitioners also mentioned that this new class of vehicle would meet a set of safety standards greater than those that

apply to LSVs, but substantially less than the full set of safety standards that apply to other light passenger cars (NHTSA, 2008).

NHTSA, however, denied the petition, mainly due to safety concerns. According to NHTSA, with a 35 mph speed limit, an MSEV would likely travel with high-speed, regular, urban traffic. In such a traffic environment, NHTSA requires the full set of Federal Motor Vehicle Safety Standards (FMVSS) to prevent fatalities and serious injuries in motor vehicle collisions, which an MSEV likely would not have met (given the petitioners' proposed MSEV criteria). The presence of a roll cage or crushproof body would not guarantee that the vehicle is crashworthy and would meet the FMVSS for passenger cars (NHTSA, 2008).

In its denial of the petition NHTSA stated, "The concept of establishing such a class of motor vehicles with limited safety features that would be likely to intermingle with larger, higher speed vehicles in urban environments would result in significantly greater risk of deaths and serious injuries." NHTSA also said, "While we appreciate the importance of environmental issues, NHTSA does not believe that it is necessary or appropriate to significantly increase the risk of deaths and serious injuries to save fuel by introducing a new class of motor vehicles that does not provide adequate safety protection" (NHTSA, 2008).

The NHTSA action does not preclude states from registering MSEVs and regulating their operation on public roadways (IIHS, 2010). Accordingly, several states have specified maximum allowable speeds for MSEVs, as described below:

- Montana was the first state to enact MSEV regulations on April 23, 2007. It has defined an MSEV as a motor vehicle having a maximum speed of 45 mph that can be operated on a roadway having posted a speed limit of no higher than 45 mph.

- Colorado has defined an MSEV as a "Class B low-speed electric vehicle" that is speed-limited at more than 25 mph but less than 45 mph and can be operated only on a roadway that has a maximum posted speed limit of 45 mph. However, it can directly cross a roadway that has a speed limit greater than 35 mph at an at-grade crossing.

- In Georgia, Minnesota, Oklahoma, North Carolina and South Carolina, the allowable speed of MSEVs ranges from 30 to 35 mph, and the maximum speed limit of the roadway on which these can be operated is 35 mph.

- In Iowa, the allowable speed of an MSEV ranges from 25 to 50 mph, and the speed limit of roadways for operating an MSEV is 55 mph.

- The Maryland legislature has redefined an MSEV as a Limited-Speed Vehicle that has a maximum speed of more than 25 mph but less than 55 mph, and it cannot be operated on a highway if the maximum speed capability of the vehicle does not exceed the posted maximum speed limit for the highway by at least 5 mph.

- In New Mexico, the allowable speed of an MSEV is 30 to 40 mph, but the roadway speed limit for this vehicle is 45 mph.

- In Oklahoma and Oregon, the maximum speed of an MSEV is limited to 35 mph, and the roadway speed limit for operating an MSEV is 45 mph.

- Tennessee has specified the allowable speed of an MSEV at 30 to 35 mph, and it can be operated on a roadway with a speed limit of 40 mph.

- In Washington, the allowable speed of an MSEV is 25 to 35 mph, and the roadway speed limit on which they can be operated is 35 mph. However, an MSEV can be also operated on a roadway having a speed limit of 45 mph if the operator meets certain criteria mentioned the legislative bill.

3.2.3.3 States where regulations of LSVs are in process

As of the date of this report, Ohio and Pennsylvania were still in the process of developing regulations for LSV types of vehicles for their state legislatures to consider. In Alabama, Arkansas and Connecticut, there was no legislation found regarding LSVs.

3.3 FEDERAL MOTOR VEHICLE SAFETY STANDARDS: FMVSS 500

The NHTSA has a legislative mandate – under Title 49 of the United States Code, Chapter 301, Motor Vehicle Safety – to issue Federal Motor Vehicle Safety Standards (FMVSS) and regulations, to which manufacturers of motor vehicles and equipment items must conform and certify compliance. FMVSS 209 was the first standard to become effective on March 1, 1967. A number of FMVSS became effective for vehicles manufactured on or after January 1, 1968. Subsequently, other FMVSS have been issued. New standards and amendments to existing standards are published in the Federal Register.

These federal safety standards are regulations written in terms of minimum safety performance requirements for motor vehicles or motor vehicle equipment. These requirements are specified in such a manner "that the public is protected against unreasonable risk of crashes occurring as a result of the design, construction, or performance of motor vehicles and is also protected against unreasonable risk of death or injury in the event crashes do occur" (NHTSA, 1998).

Federal Motor Vehicle Safety Standard No.500 (49 CFR 571.500, which became effective June 17, 1998, is a summary of the final rule of NHTSA which classified "Low-Speed Vehicle (LSV)" as a new group of motor vehicles. The rulemaking established the definition for LSVs, and specified the minimum requirements those LSVs must have in terms of speed limit and vehicle equipment to ensure the safety of the vehicle occupant and other roadway users (NHTSA, 1998). The rulemaking proceeding was initiated in response to a request by one of the LSV manufacturers, Bombardier, Inc. (NHTSA, 1998).

3.3.1 Definition

The FMVSS No.500 has classified "Low-Speed Vehicle" as a small, four-wheeled motor vehicle with a top speed of more than 20 mph and not more than 25 mph. Conventional golf carts are not included in this classification, but a "Neighborhood Electric Vehicle" (NEV) is included in this classification.

3.3.2 Requirements

3.3.2.1 Speed

The maximum attainable speed of an LSV in one mile shall be not more than 25 miles per hour.

3.3.2.2 Equipment

Each vehicle shall be equipped with headlamps; stop lamps; turn signal lamps; tail lamps; reflex reflectors, one red on each side as far to the rear as practicable and one red on the rear; an exterior mirror mounted on the driver's side of the vehicle; either an exterior mirror mounted on the passenger's side of the vehicle or an interior mirror; a parking brake; a windshield that conforms to the federal motor vehicle safety standard on glazing materials (49 CFR 571.205); a VIN that conforms to the requirements of part 565 Vehicle Identification Number; and a Type 1 or Type 2 seat belt assembly conforming to Sec. 571.209.

3.3.2.3 General test conditions and procedures

Each vehicle must meet the performance limit for the above two requirements under the test condition and test procedure specified by the Standard No.500.

Transport Canada has harmonized the Federal Canada Motor Vehicle Safety Standards with the U.S. Motor Vehicle Safety Standards (Transport Canada, 2008).

3.4 DOMESTIC MANUFACTURERS

Some of the U.S. companies that manufacture or distribute LSVs have been studied in the research. The major brands available in the U.S. are discussed below. The web references for this section are included in the Vehicle Manufacturer Web Link part of the Reference Section 8.0. Appendix B in Section 10 includes a summary table of LSV characteristics by manufacturer.

3.4.1 Dynasty Electric Vehicles Limited

Dynasty Electric Vehicles Ltd., located in Delta, B.C., Canada, is a designer and manufacturer of LSVs. The company first designed the IT line of electric LSVs in fall 1999; it produced the first Sedan model in April 2001. In addition to the basic equipment requirements specified by

NHTSA for LSVs, Dynasty Electric vehicles also offer an enclosed driver compartment, heater and de-mist facilities. Currently, the company has five models available in the market, as shown in Table 3.2. (*http://www.itiselectric.com/index.htm*)

Table 3.2: Models available from Dynasty Electric Vehicles

Model	Maximum speed (mph)
Sedan	25
Sport	24
Tropic	24
Van	24
Utility	24

3.4.2 ZENN

The name ZENN stands for "Zero Emission No Noise." The Zenn Motor Company is also a Canadian-based company that sells two models of LSVs in the U.S. They first released a car, the Dauphine Electric, in 2000. ZENN is an electric car that has a regulated maximum speed of 25 mph and a range of 35 miles on a full charge (INL, 2010). According to ZENN electric car reviews, the vehicle can be modified to go up to 40 miles per hour by changing out a computer chip (ZENN, 2010).
(*http://peswiki.com/index.php/Directory:Electric_Cars*.
http://www.carsdirect.com/electric-cars/the-zenn-electric-car-understanding-the-facts)

3.4.3 Frazer Nash

Frazer Nash Research, located in Surrey, UK, is the flagship company of the Kamkorp group. Kamkorp is a British company with headquarters in Singapore. However, Kamkorp Microelectronics, the producer of the Frazer Nash electric vehicles, is registered in Switzerland (INL, 2010). Table 3.3 shows the models of the Frazer Nash LSV.

Table 3.3: Models available from Frazer Nash

Model	Maximum speed (mph)
2001 Frazer Nash City Car NEV	25
2001 Frazer Nash truck 4XLSV NEV	25

These vehicles comply with the mandatory requirements of the NHTSA LSV technical specifications. In addition, the City Car has features such as 4-wheel drive; an odometer and speedometer; a state-of-charge meter; back-up alarm; roof-mounted solar assist array; AM/FM/CD audio system; air conditioning; tilt wheel; remote-control locking; and remote-control immobilizer. In a nutshell, the City Car has many features of a motor vehicle except that the highest operating speed is limited to 25 mph.
(*http://www.electrifyingtimes.com/think_kamkorp.html*)

3.4.4 GEM

Global Electric Motorcars, a Chrysler company, started producing battery-electric LSVs in 1998 in Fargo, ND. According to the company, almost 38,000 GEM cars have been placed into service since then. In addition to the standard requirements of the NHTSA technical specifications for LSV safety equipment, GEM cars also offer doors, heated seats, and a heater/defogger for cooler climates with a minimum impact on range. There are seven models of GEM cars – three passenger models and three utility models - as shown in Table 3.4. In 2009, the Chrysler LLC GEM brand launched its latest model, a next-generation design – the GEM Peapod NEV - which can cover a range of up to 30 miles at a top speed of 25 mph without recharging. (INL, 2010, *http://www.gizmag.com/chrysler-introduces-gem-peapod-neighborhood-electric-vehicle/10060/*)

Table 3.4: Models available from Global Electric Motorcars

Model	Maximum speed (mph)
GEM e2 (two passengers)	25
GEM e4 (four passengers)	25
GEM e6 (six passengers)	25
GEM eS (short-back utility vehicle)	25
GEM eL (long-back utility vehicle)	25
GEM e2 (extra-duty long-back utility vehicle)	25
2009 Peapod	25

3.4.5 Miles Electric Vehicles

Miles Electric Vehicles, founded in 2004, is a manufacturer and distributor of electric vehicles. Its LSVs are manufactured in China and distributed from Los Angeles, CA. It is owned by Miles Rubin, known as the "Green" magnate. Miles Electric Vehicles were the world's first crash-tested LSVs and are built on a steel unibody chassis. The results of the crash tests conducted in China have not been published. Miles was awarded "Electric Car Company of 2007" by Good Clean Tech. The vehicles meet DOT/NHTSA Federal Standard 500 compliance. Table 3.5 shows the models available from Miles Electric Vehicles (lNL, 2010).

Table 3.5 Models available from Miles Electric Vehicles

Model	**Maximum Speed (mph)**
ZX40	25
ZX40S	25
ZX40S Advanced Design	25
ZX40ST Electric Truck	25
OR70 (not legal on public roads)	35

(*http://www.milesev.com*)

3.4.6 Columbia ParCar

Columbia ParCar Corporation, established in 1984, manufactures a line of electric and gas-powered golf carts as well as utility, industrial, commercial and passenger vehicles. The successor to Harley-Davidson Golf Car Company, Columbia ParCar Corp. is a member of the Nordic Group of Companies, and its headquarters and manufacturing facility is located in Reedsburg, WI.

The Columbia ParCar Summit model of LSV offers soft-sided weather enclosures, hard-sided doors with windows, heater/defroster, rear-facing passenger seats, and an hour meter in addition to the standard requirements of the NHTSA LSV technical specifications. The models available from Columbia ParCar Corp. are shown in Table 3.6 (*INL, 2010*).
(*http://resources.bnet.com/topic/columbia+parcar+corp.html*)

Table 3.6: Models available from Columbia ParCar Corp.

Model (Passenger Vehicle)	Maximum Speed (mph)
Electric Eagle-P4E	19
Summit-SM-2	25
Summit-SM-4	25
Summit-SUV-S	25
Summit-SUV-L	25

3.4.7 ZAP

ZAP (Zero Air Pollution) is a U.S.-based electric vehicle distributor. Many of the ZAP products are designed to go up to 40 mph; however, there are two products with speed restricted to 25 mph. The ZAP Xebra Sedan Car and Xebra Truck are three-wheeled electric vehicles and are therefore classified as motorcycles in some states, including Oregon. Table 3.7 shows the available models of ZAP cars and trucks.

Table 3.7: Models available from ZAP

Model	**Maximum Speed (MPH)**
Electric Car-ZAPTRUCK XL (4 wheeler)	25
Electric Car-ZAPVAN SHUTTLE (4 wheeler)	25

(*http://www.zapworld.com/*)

3.4.8 Ruff and Tuff Electric Vehicles

Ruff & Tuff Electric Vehicles introduced its first line of electric vehicles under its own brand in 2005. The company's headquarters is located in Winnsboro, SC. All of the models have features

such as headlights, taillights, brake lights, hazard and turn signals, mirrors, horn, reverse indicator and wipers. The models available from Ruff and Tuff are shown in Table 3.8.

Table 3.8: Models available from Ruff and Tuff

Model	Maximum Speed (mph)
NEV 2	<25
NEV4	<25
CRUISER EV2	<25
CRUISER LX2	<25
CRUISER LX4	<25
HUNTER 4x4	<25

(*http://www.ruffandtuff.net/models.php*
https://inlportal.inl.gov/portal/server.pt/community/lightduty_vehicles/468/neighborhood_electric/4146)

3.4.9 Ford Th!nk Neighbor

TH!NK Mobility was an LSV enterprise of the Ford Motor Company that manufactured the Th!nk Neighbor in 1999. The LSVs were available in three models – a two-seater and a four-seater car, and a two-passenger utility truck model. Covering a range of up to approximately 30 miles, the Th!nk Neighbor had a low speed setting of 15 mph and a high speed setting of 25 mph. It met all the NHTSA FMVSS 500 requirements of low-speed vehicles (INL, 2010).

(*http://media.ford.com/article_display.cfm?article_id=3559*

http://en.wikipedia.org/wiki/Ford_TH!NK#TH.21NK_Neighbor
http://en.wikipedia.org/wiki/Think_Global)

This research project identified two other LSV manufacturing companies: NEVCO, which produces the Gizmo, and NICE, which produces the MegaCity car. The Gizmo is a three-wheeled electric vehicle and thus classified as a motorcycle, so it was not included in the group of manufacturers developed for this study (*http://www.nevco-ev.com/gizmo-review.html*). The MegaCity car has maximum speed of 40 mph, which does not qualify it as an LSV since it exceeds the maximum operating speed specified in the FMVSS 500 requirements for low-speed vehicles. (*http://nicecarcompany.co.uk/index.php/home-2/*)

4.0 SAFETY CONSIDERATIONS

4.1 CRASH TESTING

4.1.1 Introduction

The North American regulations for LSVs currently do not require that these vehicles meet any of the crash-test requirements of conventional passenger cars, since these vehicles are designed to be used on low-speed and low-volume roadways such as in gated communities or on educational or industrial campuses. LSVs are becoming more prevalent, however, on higher speed and more highly congested public roadways in Europe, Canada and the United States (BBC, 2007). Crash tests of LSVs have been conducted by Transport Canada, the Insurance Institute for Highway Safety in the U.S., the Department of Transport in the UK, and in China (IIHS, 2010). Videos of these tests are available in the public domain. LSVs were never designed to meet the additional crash and energy-attenuation requirements of passenger vehicles and therefore did not perform well in any of the crash tests (IIHS, 2010). The Canadian crash test video can be viewed at the Transport Canada link http://www.tc.gc.ca/eng/roadsafety/safevehicles-lowspeed-video-index-503.htm, and the Insurance Institute for Highway Safety video can be viewed at the following website: http://www.iihs.org/news/rss/pr052010.html

4.1.2 U.S. and Canada Crash Tests

The NHTSA vehicle category of "Low-Speed Vehicle" has emerged as part of the sustainable green transportation system. NHTSA regulations restrict the top speed of these vehicles to 25 mph in the intended operating environment of planned, gated communities. NHTSA also states that this new classification of vehicle does not need to conform to the safety standards of a conventional passenger car and consequently does not require any crash testing, due to its restricted operating environment. According to the agency, "the safety requirements of LSVs are determined by the combination of three factors – vehicle design and performance, operator training and ability; and the operating environment" (NHTSA, 1998). The agency believes that the low speed and size of the vehicle, its limited operating environment and also the operator skill in combination with the Safety Standard No. 500 ensures the appropriate safety to the occupants of these vehicles, and also provides the vehicle with required crash avoidance and crash-protection characteristics as well (NHTSA, 1998). For these reasons, the LSVs do not need to meet any crash test program in the U.S., unlike other conventional passenger cars. However, given that their use has increased on public roadways among regular auto and truck traffic operating at higher speeds, these vehicles are becoming increasingly susceptible to risk even with the FMVSS 500 safety features and limited operating speed.

Transport Canada first conducted a series of crash tests on LSVs to determine the risks of mixing low-speed vehicles with high-speed and high-volume urban traffic. In one crash test, an LSV was subjected to a frontal crash impact test with a rigid barrier at a speed of 40 km/hr (25 mph). In another crash test, a stationary LSV was subjected to a side crash test with a "Smart" microcar

(Daimler AG), operating at a speed of 50 km/hr (31 mph). The results of both of the crash tests revealed that the impact forces resulting from the collisions were directly transmitted to the occupants of the LSV, which would result in severe injuries or death to the passenger and driver (Transport Canada, 2008). The Canadian crash test video may be viewed at the Transport Canada website at the following URL link: http://www.tc.gc.ca/eng/roadsafety/safevehicles-lowspeed-video-index-503.htm.

In the United States, the Insurance Institute for Highway Safety (IIHS) performed a crash test on low-speed vehicles to identify the impact of the operation of LSVs on public roadways. The IIHS was very concerned about the severe consequences of operating LSVs simultaneously with high-volume regular traffic. The institute's chief research officer, David Zuby, said, "By allowing LSVs and mini-trucks on more and more kinds of roads, states are carving out exceptions to 40 years of auto safety regulations that save lives. It's a troubling trend that flies in the face of the work insurers, automakers, and the federal government has done to reduce crash risk." (IIHS, 2010)

To perform the crash test, the IIHS used two electric LSVs, both GEM e2 models produced by Global Electric Motorcars of the Chrysler Group. According to the statement of the Chrysler Group – "GEM vehicles offer customers an inexpensive, clean solution for low speed environments and comply with the National Highway Traffic Safety Administration standards for low speed vehicles which limit the maximum speed of the vehicle to 25 miles per hour." (*Valdes-Dapena 2010*). In the test, the two GEM e2 LSVs were subjected to 31 mph side crashes – one using a moving deformable barrier representing a pickup or SUV, and the other using a "Smart Fortwo" (Daimler AG) as the striking vehicle. The "Smart" is currently the smallest passenger vehicle on U.S. roads that meets crashworthiness standards (IIHS, 2010). The Insurance Institute for Highway Safety video may be viewed at the IIHS website, at the following URL link: http://www.iihs.org/news/rss/pr052010.html.

The results of both side crash tests revealed that the impact of the collision on the low-speed vehicle would likely cause serious or fatal injury to the LSV user. The test results also indicated that the safety features such as the airbag and the side body panel of the "Smart Fortwo" conventional passenger car protected its occupant from severe injury during the crash. From the crash test results, it was concluded that LSVs with safety features such as safety belts and thermoplastic body panels (sometimes accompanied by doors) provide a substantially lower level of crash protection to their occupants during a collision than passenger cars in urban traffic (IIHS, 2010). According to Zuby, "GEMs and other LSVs weren't designed to protect people in a crash with a microcar like the Smart Fortwo, let alone larger cars, SUVs, and pickups in everyday traffic." *(*IIHS,2010*)*

It should be noted that crash tests conducted in Europe all used very small, conventional passenger cars. No standard size or larger vehicles have been crash tested with LSVs.

4.2 OPERATING ENVIRONMENT

4.2.1 Speed

A study conducted in Quebec reported that drivers of LSVs feel more vulnerable. They reported that, while traveling on two-lane, two-way roadways, other drivers expressed frustration at the lack of sufficient roadway for them to overtake the slow-moving vehicle. This should not be a problem on roadways posted at 25 mph or less; however, LSV drivers have mentioned that other vehicle operators like to drive 5 to 10 mph over the posted speed limit (Lamy, 2002).

In Oregon, it is legal to operate LSVs with a maximum operating speed of 25 mph on public roadways with posted speeds of 35 mph, and in some locations even 45 mph (ORS 801.331). These operating conditions increase the frustration of operators of other motor vehicles and the feeling of vulnerability by LSV users. In Oregon, there has also been a lack of consistent information when LSVs are licensed from the ODOT Driver and Motor Vehicle (DMV) Division about the posting of the "Slow Moving Vehicle" emblem in the rear of an LSV under the provisions of ORS 815.110 (ODOT/DMV, 2010).

4.2.2 Speed differential

The theory of minimizing speed differential on roadways is one of the basic tenets in the traditional transportation engineering discipline. A speed differential occurs when there is a vehicle moving faster or slower than the general traffic stream. One of the goals of traffic engineering is to have uniform traffic flow, as this increases the capacity of a roadway and improves overall safety but reduces speed fluctuations. This theory is applied to a number of situations such as the design of off- and onramps, and the design of driveways to improve safety and access management. There are a number of safety issues associated with slow-speed operations. This is depicted in Solomon's Curve, shown in Figure 4.1. It shows that a 10-20 mph speed differential increases the collision rate (Solomon, 1964; Cirillo, 1968; West, 1971).

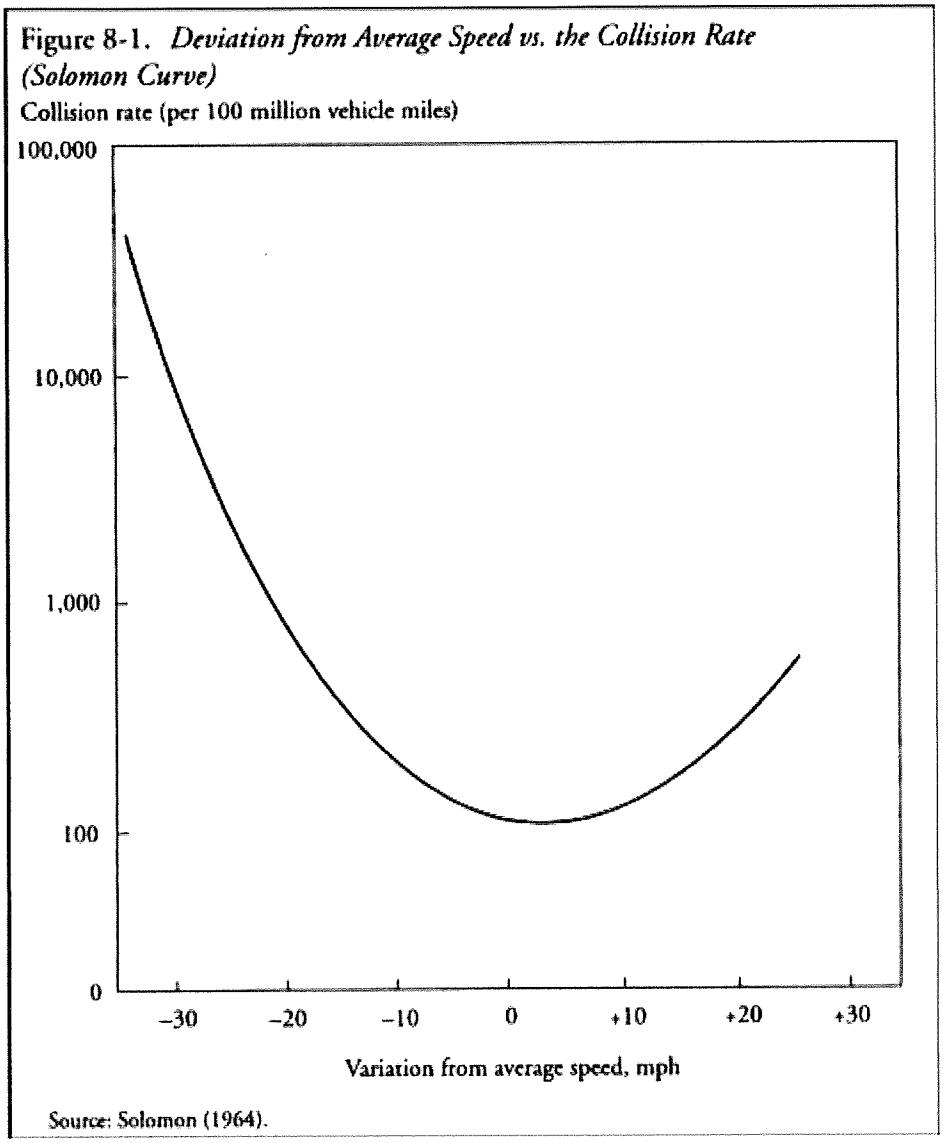


Figure 4.1: Solomon's Curve Deviation from Average Speed and Collision Rate

4.3 VEHICLE WEIGHT

In 1998, when NHTSA established Federal Motor Vehicle Safety Standard (FMVSS) No. 500, the definition of an LSV was established as, "a 4-wheeled motor vehicle, other than a truck, whose speed attainable in 1.6 km (1 mile) is more than 32 kilometers per hour (20 miles per hour) and not more than 40 kilometers per hour (25 miles per hour) on a paved level surface" (NHTSA, 1998). But in 2005, NHTSA amended the definition of LSVs by dropping the restriction on trucks, and instead establishing a 2,500 pound maximum gross vehicle weight rating (GVWR). This amendment allowed small vehicles designed for work-related applications

within the intended communities (such as landscaping or delivery) to be included within the definition of an LSV without opening the category to unintended vehicles, such as street sweepers or speed-modified passenger cars. Also, the GVWR limit prevents attempts to circumvent the FMVSS for cars, trucks and multipurpose passenger vehicles by applying the LSV classification to vehicle types that are able to meet the standards. Defining an LSV as having a maximum GVWR of less than 2,500 pounds also provides an objective means for delineating between the vehicles for which the LSV requirements are appropriate and those vehicles that can be designed to meet the FMVSS for passenger cars and trucks. This approach also ensures that heavier, slow-moving trucks (e.g., street sweepers) continue to be excluded from the LSV definition (NHTSA, 1998).

In 2006, in response to petitions for reconsideration from Dynasty Electric Car Corporation and Global Electric Motorcars (GEM) – both manufacturers of electric LSVs – NHTSA increased the maximum GVWR for LSVs to 3,000 pounds. This was done, in part, to "level the playing field" between electric and gasoline-powered LSVs, by allowing for the additional weight in batteries required by electric vehicles. A 3,000-pound GVWR limit was selected because it was lighter than all FMVSS-compliant passenger cars and SUVs, with the exception of the Honda Insight. In addition, NHTSA limited the GVWR of an LSV to 3,000 pounds in combination with the maximum speed limit of 25 mph for the purpose to restricting the use of these vehicles in mixed vehicle traffic for other than very short trips, and to encourage their transportation within a planned, limited environment, such as retirement and gated communities (NHTSA, 2008).

The GVWR was selected by NHTSA as one of the criteria to define LSVs, rather than curb weight, because curb weight describes only the weight of the vehicle and not its capacity. But GVWR is a description of the maximum possible weight of the fully loaded vehicle. So GVWR is more pertinent to safety. Limitation of GVWR to "less than 3,000 pounds" in addition to the other limiting attributes of the definition of LSVs negates the need to specify a minimum-rated cargo load (RCL) to prevent the operation of these vehicles in overloaded conditions for safety purposes (NHTSA, 2008).

Transport Canada, in the spirit of regulatory harmonization, also made similar amendments to its regulation and defined a low-speed vehicle as having a GVWR of less than 1,361 kg. (MVSA C.R.C.C 1038).

4.4 IMPACT RESISTANT CABS AND OTHER SAFETY EQUIPMENT

In 1998, when NHTSA first defined the LSV class, the main purpose of these vehicles was to make short trips for shopping, social and recreational purposes primarily within retirement or other planned, self-contained communities. Maintaining this goal, when NHTSA redefined the GVWR-based definition of LSVs in 2003, the agency limited the GVWR to 3,000 pounds. NHTSA's rationale for this decision was that this special class of vehicles, when provided with additional amenities and characteristics of a traditional passenger car, would be driven outside the planned communities and would regularly mix with high-volume traffic on roadways, even with a 25 mph speed limit. These special vehicles do not have any safety features such as air bags, energy-attenuating bumpers or crash resistant cabs. The FVMSS 500 for LSVs does not require any crash safety amenities (NHTSA, 2008). None of the LSVs running on the road or

available on the market to date, have any of these safety features. A study by Transport Canada revealed that a traditional passenger car needs to meet over 40 safety standards, whereas LSVs are required to meet only four standards. (Transport Canada, 2009)

4.5 VULNERABILITY

LSVs are lighter than the FMVSS-compliant passenger cars. Also, they do not meet all the safety standards of motor vehicles in the United States, Canada or the European Union. So they are less crash protective than any conventional car, even less than the smallest "Smart" passenger car. The forces and energy generated from the collision of an LSV with any rigid barrier or any other vehicle while operating in mainstream traffic is directly transmitted to the occupants of the LSV. Thus there is the potential for serious injuries or death to LSV occupants. With an increase in speed, the kinetic energy increases proportionally with the square of the speed. For example, with a 3,000 pounds GVWR, the kinetic energy generated from a collision at 35 mph is almost twice the kinetic energy generated from a collision at 25 mph. Therefore, operating an LSV on a roadway having a posted speed limit of 35 mph with high-speed traffic makes the occupants of the LSV more vulnerable to the risk of serious injury or death. Table 4.1 shows the kinetic energy associated with increasing speeds of a 3,000-pound vehicle (including driver and cargo). The steep increase in the kinetic energy with increasing speeds provides an idea of the increase of risk in an LSV collision.

Table 4.1: Kinetic energy associated with increasing speeds

Vehicle Weight (lbs)	**Kinetic Energy (ft-lbs) at Different Speeds**		
3000	25 mph	35 mph	45 mph
	63021	123,520	204,187.5

The energy generated during the collision of a conventional passenger car, which meets all the safety standards of motor vehicles in either the U.S. or Canada, is dissipated to a great extent before it is transmitted to the occupants inside the car. This occurs due to the occupant protected body and internal crash protecting design attributes of the passenger car. But LSVs lack all these crash protecting attributes. So the risk of fatal injury during a collision in an LSV increases dramatically with increasing speed (Transport Canada, 2008).

4.5.1 Street Infrastructure

Every mode of transportation has its own right-of-way, or it can share the path with other transportation modes. Passenger vehicles run on residential, collector or arterial streets; bicycles are used on bicycle lanes or multiuse paths; and pedestrians walk on sidewalks and crosswalks. There are no dedicated rights-of-way for low-speed vehicles other than in communities that are specifically designed and built to accommodate these vehicles.

When LSVs use the same right-of-way with high-speed passenger vehicles and trucks, it imposes a great risk to the LSV's operator and passengers due to the speed differential and the construction of the two different types of vehicles. Also, the use of the "slow-moving vehicle" emblem for LSVs (like golf carts) is too limited to make faster-moving vehicles aware of and accustomed to LSVs on roadways. All these factors make the operators of LSVs more vulnerable when they run simultaneously on high-speed roadways (Stein, et al., 1996).

4.5.1.1 Sharing the roadway

LSVs were designed to be used in protected environments such as gated communities and industrial and college campuses, but not on public roadways. An increased public awareness of climate change, the environment and sustainable transportation has increased the popularity of these vehicles as a new mode of private transportation; consequently, they are becoming part of the mix of vehicles on public roadways. Some of these vehicles look like passenger cars, and many consumers are not aware of their operating and safety limitations. In the next five years, there will be a number of all-electric passenger vehicles coming on the market that do meet the safety requirements and performance levels of passenger vehicles. It is very important in the interim that operating guidelines for LSVs are developed to protect all road users and also to recognize the environmental advantages of these vehicles.

4.5.1.2 Multiuse paths

Multiuse paths are typically shared-use paths of pedestrians, bicyclists, equestrians and wheeled-mobility aids that are operated by people with disabilities. These paths are typically not very wide and are not striped for two-way traffic. The rules of operation are that all users yield to pedestrians. LSVs are much wider, heavier and faster than pedestrians and the other devices used by people of shared-use paths. Thus there is the potential to put all the other multiuse path users at risk, unless the path is designed specifically to accommodate LSVs. It is not recommended that LSVs share multiuse paths unless the paths are specifically designed for that purpose.

4.5.1.3 Civic interconnectivity

One of the challenges for LSV operators is navigating the urban roadways that meet all speed restrictions. In many communities, LSV operators are not able to complete a trip from origin to destination without violating either speed or crossing restrictions. One solution to this problem would be for communities to identify roadway networks that accommodate LSVs as well as other road users who operate mopeds and human-powered vehicles, and who do not want to travel on high-speed, high-volume arterials.

An example of this situation is in the city of Corvallis, OR, where one of the major north-south roadways is 9th Street – a major five-lane arterial with a center two-way, left-turn lane, which carries a high volume of traffic that includes trucks. The roadway does include bike lanes, but many of the regular bicycle riders in Corvallis prefer to ride on 10th Street, a residential street which runs parallel to 9th Street and has a much lower speed and traffic volume but still connects major activity centers. LSV owners and the local bicycle community could work together to identify a low-speed street network that connects the major residential and activity centers. The

result of this work may include the necessary modification of intersection control and the designation of certain roadways.

Using Corvallis as an example, the Campus Way bike path between 35th Street and 53rd Street is currently a multiuse path for agricultural vehicles, bicycles and pedestrians that provides east-west access between the Benton County Fairgrounds and Oregon State University. It has a posted speed limit of 15 mph and all road users must yield to pedestrians. It is a wide roadway with space to accommodate all users. If this roadway were designated for LSVs, then LSV operators would have access to the fairgrounds and a county park. This example of Campus Way does mix pedestrians with the other road users. This practice is not generally advised, however. The recommended parallel roadway networks should have separate pedestrian facilities.

4.5.2 Crash Data

ODOT's Crash Code manual and the federal Fatal Accident Reporting Systems (FARS) currently do not include any listing for low-speed vehicles. As a consequence, there is no crash data available for Oregon.

5.0 INSURANCE

In almost every jurisdiction, to be qualified as a street-legal vehicle each vehicle on the roadway, including low-speed vehicles, must have insurance. The concept of electric low-speed vehicles is still relatively new to the auto insurance industry, and as a result not all of the insurance companies provide coverage for LSVs. GEICO, one of the leading U.S. insurance companies, only insures LSVs in California, North Carolina and Rhode Island (because it is bound by law to do so). Progressive, another well-known insurance company, does not insure LSVs at all, as it insures only those vehicles capable of maintaining a speed of 55 miles per hour. State Farm Insurance and the Allstate Insurance Company do offer insurance coverage for low-speed electric vehicles, but this does not include any collision coverage (Johannsen, 2010).

Among all the auto insurance companies identified by the published information on the Internet, only Foremost Insurance Group offers specialized insurance coverage for off-road and licensed on-road neighborhood electric vehicles. Their insurance policy includes important standard and optional coverage such as collision coverage, liability coverage, medical payments coverage, coverage for accessories and optional equipment (including towable trailers, solar panels and aftermarket accessories), and coverage on transport trailers valued up to $7,500. (Foremost, 2010).

Some other companies may offer insurance coverage for an electric low-speed vehicle that is purchased from that company. One such example is Gatormoto Utility Vehicles (Gatormoto, 2010)

Some LSV owners in Oregon have indicated that their LSVs are insured under their homeowner's policy.

6.0 CONCLUSIONS

Low-speed vehicles have become increasingly popular due to their reduced environmental impact and lower operating cost. These vehicles need to be recognized as a unique classification of vehicle with related regulations for their safe use and operation on public roadways. The transportation and safety operating parameters for this classification of vehicle need to be developed to insure the safety of all roadway users.

This project investigated safety standards, operating regulations, and LSV manufacturer materials from sources around the world. There were several important issues that were identified in the course of this research:

- LSVs were designed to be used in controlled or protected environments and roadways;
- The safety standards that were developed in Europe and North America were developed with the underlying premise that LSVs would be operated on low-speed roadways in protected environments. Therefore, the regulations do not have any provisions for occupant crash protection other than seat belts; and
- In North America, states, provinces and local governments have the legal authority to set regulations pertaining to motor vehicles operating on the roadways under their jurisdictions. In many circumstances, these regulations significantly increase the risk exposure to LSV users.

In many jurisdictions throughout the world, the vehicle safety and roadway operating regulations are inconsistent.

6.1 SAFETY PARAMETERS

In Europe and North America, national vehicle safety organizations have worked together to harmonize the safety regulations for LSVs, and in all cases with the underlying premise that these vehicles operate on protected low-speed roadways. However, the reality is that these vehicles are operating on public roadways with posted speed limits that, in a few states, are 10 to 20 mph higher than the maximum speed of the vehicle. Safety research has shown that speed differential is likely to increase collision frequency (Solomon, 1964). Furthermore, crash testing has shown that the occupants of LSVs are at risk of serious or fatal injury if they are involved in a collision with an impact speed of as low as 25 mph (IIHS, 2010).

The roadway regulations only address the posted speed limit, not the actual speed of the vehicles on the roadway. In general, roadway speed regulations are based on the roadway geometrics, such as number of lanes, traffic volume, and access points, and the roadway classification

(collector, arterial or highway). Other than specific truck speed regulations, roadway speeds do not consider the type, size or weight of vehicles.

It is assumed that protected low-speed environments are also low-volume roadways such as cul de sacs and neighborhood streets. There is strong evidence, however, from cities in North America and Europe, such as London, that LSVs are operating on high-volume roadways with heavy vehicles. For the protection of all road users, there is a need to make the federal vehicle safety standards and the state and local roadway vehicle regulations consistent. If LSVs are limited to roadways with the maximum posted speed limit set to equal the maximum speed of the LSV – and in most regions this is 25 mph – then the current safety regulations are appropriate, but only if the roadway does not have heavy traffic volumes or heavy vehicles.

Medium-speed vehicles, which were denied a petition by NHTSA under FVMSS 500.571, should be required to meet the additional safety requirements of the federal motor vehicle safety standards for conventional vehicles, including passing crash tests. Or they should be limited to operation on roadways with a posted speed of 25 mph or less. As stated previously, a roll cage and crushproof body is an improvement, but is not equivalent to the crash protection on a conventional passenger car.

It is widely recognized by owners of certain models of LSVs that the speed governor can be modified so that the LSVs can operate at much higher speeds than 25 mph. It should be noted that this is in violation of federal and state regulations. In this situation there is a need to either enforce existing federal and state regulations, or change the occupant safety requirements for these vehicles to provide a similar level of occupant protection as that which is provided in a conventional passenger car.

Since many of these LSVs have the outward appearance of a conventional car, some of the owners may be unaware of the safety risks of these vehicles. Consumer education is needed to inform LSV owners of the safety limitations of their vehicles. It should be noted that the lack of occupant protection in most LSVs also is reflected in the lighter weight of the vehicles, the increased power efficiency and the environmental benefit of these vehicles.

6.2 OPERATING ENVIRONMENT

Low-speed vehicles were developed for use in protected environments, but many people see the environmental benefit of these vehicles and are operating them on public roadways. These vehicles can be operated safely on certain public roadways such as low-speed neighborhood streets, local streets and some collector streets with posted speed limits less than or equal to 25 mph. It would be prudent for state and local authorities to work with their local LSV users and bicycle advocates to develop local networks of low-speed roadways that provide street connectivity between major residential neighborhoods and public transportation facilities and activity centers such as schools and colleges, business centers, shopping facilities, medical services, and recreational centers. These roadways would provide a secondary transportation network for other types of road users who do not want to travel on higher-speed corridors.

6.3 REGULATORY AND SPEED HARMONIZATION

As stated previously, the national vehicle safety organizations have worked together to harmonize safety regulations so that LSV manufacturers only need to meet either North American or European standards for their vehicles. The challenge is that state and local authorities set the operating regulations for motor vehicles on the roadways under their jurisdictions. There is compelling evidence from the domains of roadway safety and LSV testing that LSVs should be limited to roadways with maximum posted speed limits that do not exceed the maximum operating speed of the LSV. In general this is 25 mph.

LSVs also should be restricted to crossing higher-speed roadways at controlled intersections or intersections with stop controls on all approaches. Unfortunately, many U.S. states have regulations that permit these vehicles to travel on roadways with higher posted speed limits and therefore increase the vulnerability and safety risks to LSV users. Harmonization of the local and state roadway speed regulations and federal vehicle safety regulations for LSVs would be a step towards improving safety for all roadway users.

7.0 RECOMMENDATIONS

LSV is a new vehicle classification that has the potential for many environmental benefits, such as reduced air pollution and noise. These environmental benefits, however, must be balanced by the need for the safety of all road users. Following are several recommendations from this research.

7.1 STATE AND LOCAL LSV REGULATIONS

State and local authorities need to understand the safety implications for all users when LSVs are permitted to operate on roads with posted speed limits that are higher than the maximum operating speed of the vehicles. In Oregon, it is recommended that a revision be made to the current LSV legislation that was enacted in February 2010. Specifically, this would entail revising ORS 811.512 (Unlawfully operating low-speed vehicle on the highway) and/or ORS 811.513 (Unlawfully operating medium-speed electric vehicle on highway). In the spirit of regulatory harmonization, the recent Oregon legislation granting authority to local jurisdictions to set regulations for LSVs operation should be amended to require local operating regulations to be consistent with state and federal regulations.

It is also recommended that medium-speed vehicles, which were denied a petition by NHTSA under FVMSS 500.571, should be required to meet the additional safety requirements of the federal motor vehicle safety standards for conventional vehicles or be limited to operation on roadways with a posted speed of 25 mph or less.

7.2 STATE AND LOCAL PLANNING

It is recommended that state and local authorities work with their local LSV users and bicycle advocates to develop local networks of low-speed roadways that provide street connectivity of major residential neighborhoods and activity centers that provide employment, education, medical services, recreation, and retail shopping. These low-speed roadways would provide a secondary transportation network for multiple types of other road users who should not travel on higher-speed corridors, such as human-powered vehicle users who prefer low-speed roadways. The low-speed roadways should also have separate pedestrian facilities. This recommendation does not have to involve construction of new facilities. It would entail the identification and signage of existing roadways that provide complementary connections between residential neighborhoods and activity centers.

7.3 CONSUMER EDUCATION

It is recommended that LSV operators be informed of the safety limitations of their vehicles, especially for models that look like cars. LSV consumers need to understand their personal safety risk if they change the speed governors of their LSVs. LSV users also should be educated

about the risk factors of driving a vehicle that does not provide crash protection on public roadways.

8.0 REFERENCES

BBC News, May 23, 2007, Crash tests results of the REVA-G wiz. http://www.youtube.com/watch?v=btw3DaqJbpI

Cirillo, J.A. Interstate System Accident Research Study II, Interim Report II. *Public Roads* 35.2, pp. 71–75. 1968

Energy Information Administration. EIA's Annual Energy Review, Table 10.4. Available at www.eia.doe.gov/emeu/aer/renew.html. 2007.

Fazzalaro, James, J. *Neighborhood Electric Vehicles*. Report 2008-R-0479. Office of Legislative Research. Connecticut General Assembly, September 22, 2008.

Foremost: http://www.foremost.com/products/neighborhood-electric-vehicle/coverage-options.htm,, Accessed June 2010

Gatormoto: http://www.gatormotoutilityvehicles.com/electric-vehicle-insurance.php, Accessed June 2010

Idaho National Laboratory (INL), "*Neighborhood Electric Vehicles Vehicle Testing Reports Fact Sheets*" http://avt.inel.gov/nev.shtml, assessed April 2010

Insurance Institute for Highway Safety (IIHS). "Definetly not Crashworthy", Status Report Insurance Institute for Highway Safety, Volume 45 No. 5, May 20, 2010, http://www.iihs.org/news/rss/pr052010.html, accessed June 2010

Johannsen, Bryan," Insuring an Electric Car", The Car Electric, April 9, 2010 http://www.thecarelectric.com/content/insuring-an-electric-car.php.Accessed June 2010

Lamy, V., " Assessment of Low-Speed Electric Vehicles in Urban Communities: Pilot Project, Transportation Development Centre, Transport Canada, Report TP 13942E, April 2002

National Highway Traffic Safety Administration (NHTSA) (1998). "Notices and Final Rules: Low Speed Vehicles," 49 CFR part 571 Federal Motor Vehicle Safety Standards, Low Speed Vehicles, June 17, 1998, <http://www.nhtsa.gov/cars/rules/rulings/lsv/lsv.html>.

National Highway Traffic Safety Administration (NHTSA) (2008). "Notices and Final Rules: Low Speed Vehicles," 49 CFR part 571 Federal Motor vehicle Safety Standards, Low Speed Vehicles, Proposed Rule, September 26, 2008

Oregon Department of Transportation, Department of Motor Vehicles, Vehicle Code Book Chapter 815, section 110 http://www.oregon.gov/ODOT/DMV/docs/vcb/VCB815.pdf, Accessed August 17, 2010

Oregon Revised Statutes 2009, Volume 17 Chapters 801, 803, 805, 811, and 814, Oregon State Legislature Available at http://www.leg.state.or.us/ors/

Oregon State Public Interest Research Group (OSPIRG). "Cleaner Cars for Oregon." Available at http://www.ospirg.org/OR.asp?id2=18821.

Regulations Respecting Safety for Motor Vehicles and Motor Vehicle Components Enabling Statute: Motor Vehicle Safety Act (Government of Canada), http://www.gazette.gc.ca/rp-pr/p2/2008/2008-08-06/html/sor-dors229-eng.html

Shafizadeh, Kevan, and Fox, K., " A Report to the California State Legislature" NEV Transportation Plan Evaluation, the City of Lincoln, CA, January 2008

Solomon, D., " Accidents on Main Rural Highways Related to Speed, Driver, and Vehicle." Washington, DC: Federal Highway Administration. 1964

Stein, A.G., K. Kurani, and D. Sperling. "Roadway Infrastructure for Neighborhood Electric Vehicles," *Transportation Research Record 1444*, p. 23-27. (1996)

Transport Canada: Questions and Answers for Low –Speed Vehicles: http://www.tc.gc.ca/eng/roadsafety/tp-tp2436-rs200803-faq-771.htm

Transport Canada: Low-speed vehicle Information Sheet, Fact Sheet TP 2436E, July 2008

Transport Canada, NEV crash test, including crash test video: http://www.tc.gc.ca/eng/roadsafety/safevehicles-lowspeed-video-index-503.htm, July 2009

Tucker, Libby. "PGE charges up for plug-in hybrid cars." *Daily Journal of Commerce*. July 1, 2008. Available at http://www.djcoregon.com/articleDetail.htm/2008/07/01/PGE-charges-up-for-plugin-hybrid-cars-Utility-partnering-with-ODOT-to-install-electricvehicle-charging

United Kingdom Department of Transport, (1999) Regulations for powered two and three-wheeled vehicles, , Accessed March 2010

Valdes-Depena, Peter, , "*Ultra-light vehicles crunched in crash tests*", CNNMoney.com., New York, May 20, 2010

West, L.B. Jr. and J.W. Dunn. Accidents, Speed Deviation, and Speed Limits. *Traffic Engineering* July 1971, pp. 52–55. 1971.

ZENN, "Consumer information for speeding up ZENN" : http://www.electric-cars-are-for-girls.com/speed-up-your-zenn.html, Accessed February 2010

LSV Manufactures Websites

Dynasty Electric Vehicles Limited
http://www.itiselectric.com/index.htm. Accessed June 30,2010.

ZENN:
http://peswiki.com/index.php/Directory:Electric_Cars. Accessed June 30, 2010.
http://www.carsdirect.com/electric-cars/the-zenn-electric-car-understanding-the-facts. Accessed June 30, 2010.

Frazer Nash
http://www.electrifyingtimes.com/think_kamkorp.html. Accessed June 30, 2010.

GEM
http://www.gizmag.com/chrysler-introduces-gem-peapod-neighborhood-electric-vehicle/10060/. Accessed June 30, 2010.

Miles Electric Vehicles
http://www.milesev.com. Accessed July 1, 2010.

Columbia ParCar
http://resources.bnet.com/topic/columbia+parcar+corp.html. Accessed July 1, 2010.

ZAP
http://www.zapworld.com/. Accessed July 1, 2010.

Ruff & Tuff Electric Vehicles
http://www.ruffandtuff.net/models.php. Accessed July 1, 2010.https://inlportal.inl.gov/portal/server.pt/community/lightduty_vehicles/468/neighborhood_electric/4146. Accessed July 1, 2010.

Ford Th!nk neighbor
http://media.ford.com/article_display.cfm?article_id=3559. Accessed July 1, 2010.http://en.wikipedia.org/wiki/Ford_TH!NK#TH.21NK_Neighbor. Accessed July 1, 2010.http://en.wikipedia.org/wiki/Think_Global. Accessed July 1, 2010.

9.0 APPENDIX A STATE REFERENCES

State References (Web Links)

Alaska: (Reference Senate Bill 59, 2010, and Alaska Statutes 28.10, 28.35.261, and 28.90.990)
http://www.afdc.energy.gov/afdc/laws/law/AK/6085

Arizona: (Reference Arizona Revised Statute 28-101, 28-966, 28-2052, 28-2157)
http://www.azleg.gov/ArizonaRevisedStatutes.asp

California: (Reference California Vehicle Code 385.5 and 21250-21266))
http://www.dmv.ca.gov/pubs/vctop/vc/tocd11c1a5-2.htm

Colorado: (Reference Senate Bill 075, 2009, and Colorado Revised Statutes 12-6-120, 42-1-102, 42-4-109.5, 42-4-109.6)
http://www.colorado.gov/cs/Satellite/Revenue-MV/RMV/1249479509156
http://www.michie.com/colorado/lpext.dll?f=templates&fn=main-h.htm&cp=

Delaware: ((Reference Delaware Code Title 21, Chapter 21, Section 2113A)
http://www.dmv.de.gov/services/vehicle_services/other/sb17_low_speed_vehicle.pdf
http://delcode.delaware.gov/title21/c021/sc01/index.shtml

District of Columbia: (Reference Title 18, Chapter 7, Sec 757 and Chapter 99, Sec 9901 of DCMR)
http://www.dcregs.dc.gov/Gateway/RuleHome.aspx?RuleID=3549732

Florida: (Reference Florida Statutes 316.2126, 320.01, and 320.0847)
http://www.leg.state.fl.us/Statutes/index.cfm?App_mode=Display_Statute&Search_String=&URL=Ch0316/SEC2122.HTM&Title=->2009->Ch0316->Section%202122#0316.2122

Georgia: (Reference Georgia Statutes Title 33, Section 33-34-2, and Title 40, Section 40-1-1,40-6-360,40-6-361,40-6-362, 40-6-365, 40-6-366, 40-6-367)
http://www.legis.state.ga.us/legis/2009_10/sum/hb530.htm
http://www.georgia.gov/00/article/0,2086,5635600_6640623_129906669,00.html
http://law.justia.com/georgia/codes/40/40-6-360.html
http://law.justia.com/georgia/codes/40/40-6-361.html
http://law.justia.com/georgia/codes/40/40-6-362.html

Hawaii: (Reference Hawaii Revised Statutes Sections 286-2, 286-41, and 291C-134)
http://www.afdc.energy.gov/afdc/laws/law/HI/5598

Idaho: (Reference Idaho Statutes 49-115, 49-123, 49-402, and 49-663)

http://www.afdc.energy.gov/afdc/laws/law/ID/5824

Illinois: (625 Illinois Compiled Statutes 5/1-140.7 and 5/11-1426.2)
http://www.ilga.gov/legislation/ilcs/ilcs3.asp?ActID=1815&ChapterID=49
http://www.ilga.gov/legislation/ilcs/ilcs4.asp?DocName=062500050HCh.+1&ActID=1815&ChapterID=49&SeqStart=100000&SeqEnd=30000000
http://www.ilga.gov/legislation/ilcs/ilcs4.asp?DocName=062500050HCh.+11&ActID=1815&ChapterID=49&SeqStart=102800000&SeqEnd=125900000

Indiana: (Indiana Code 9-21-5-8.5 and 9-13-2-94.5)
http://www.in.gov/legislative/ic/code/title9/ar13/ch2.html
http://www.in.gov/legislative/ic/code/title9/ar21/ch5.html

Iowa: (Iowa Code 321.381A)
http://www.legis.state.ia.us/GA/78GA/Legislation/HF/02300/HF02312/Current.html
http://coolice.legis.state.ia.us/Cool-ICE/default.asp?category=billinfo&Service=Billbook&hbill=HF533&menu=text&ga=83

Kansas: (Kansas Statutes 8-1488; 8-15,101; 8-1701; and 8-2118)
http://www.kslegislature.org/legsrv-statutes/getStatuteInfo.do

Kentucky: (Kentucky Revised Statutes 186.010 and 189.282)
http://lrc.ky.gov/KRS/186-00/010.PDF
http://lrc.ky.gov/KRS/189-00/282.PDF

Louisiana: (Louisiana Revised Statutes 32:300.1)
http://www.legis.state.la.us/lss/lss.asp?doc=181445

Maine: (Maine Revised Statutes Title 29-A, Sections 1925 and 2089)
http://www.mainelegislature.org/legis/statutes/29-A/title29-Asec2089.html
http://www.mainelegislature.org/legis/statutes/29-A/title29-Asec1925.html

Maryland: (Reference Maryland Statutes, Transportation Code 11-130.1, 21-313, 21-1125, and 22-101, Senate Bill 344, 2010)
http://mlis.state.md.us/asp/statutes_respond.asp?article=gtr&section=11-130.1&Extension=HTML
http://mlis.state.md.us/asp/statutes_respond.asp?article=gtr&section=21-1125&Extension=HTML
http://mlis.state.md.us/asp/statutes_respond.asp?article=gtr&section=22-101&Extension=HTML
http://mlis.state.md.us/2010rs/bills/sb/sb0344t.pdf

Massachusetts: (The General Laws of Massachusetts, Chapter 90: Section 1G)
http://www.mass.gov/legis/laws/mgl/90-1g.htm

Michigan: (MICHIGAN LEGISLATURE, Section 257.660)

http://www.legislature.mi.gov/%28S%28j4cdrqe2hsml0245mv1yk345%29%29/mileg.aspx?page=getObject&objectName=mcl-257-660

Minnesota: (Minnesota Statutes 169.011 and 169.224)
https://www.revisor.mn.gov/statutes/?id=169.224&year=2009&keyword_type=all&keyword=neighborhood+electric+vehicle
https://www.revisor.mn.gov/statutes/?id=169.011
https://www.revisor.mn.gov/statutes/?id=169.224

Mississippi: (Mississippi legislature; REGULAR SESSION 2010; HOUSE BILL NO. 372)
http://billstatus.ls.state.ms.us/documents/2010/pdf/HB/0300-0399/HB0372IN.pdf

Missouri: (Missouri Revised Statutes 304.029)
http://www.moga.mo.gov/statutes/c300-399/3040000029.htm

Montana: (Montana Code Annotated 2009)
http://data.opi.mt.gov/bills/mca/61/1/61-1-101.htm

Nebraska: (NEBRASKA REVISED STATUTE 60-119.01)
http://nebraskalegislature.gov/laws/statutes.php?statute=60-119.01

Nevada: (Nevada Revised Statutes NRS 484B.637, Substituted in revision for NRS 484.527)
http://www.leg.state.nv.us/Division/Legal/LawLibrary/NRS/NRS-484B.html#NRS484BSec637

New Hampshire: (New Hampshire Revised Statutes 259:66-b; 265:158; and 266:114)
http://www.gencourt.state.nh.us/rsa/html/XXI/259/259-66-b.htm
http://www.gencourt.state.nh.us/rsa/html/XXI/265/265-158.htm
http://www.gencourt.state.nh.us/rsa/html/XXI/266/266-114.htm

New Jersey: (New Jersey Statutes 39:4-31)
http://lis.njleg.state.nj.us/cgi-bin/om_isapi.dll?clientID=231787&Depth=4&TD=WRAP&headingswithhits=on&infobase=statutes.nfo&rank=&softpage=Doc_Frame_Pg42&wordsaroundhits=2&x=25&y=19&zz=

New Mexico: (New Mexico Statutes 66-1-4.12 and 66-3-1103)
http://www.conwaygreene.com/nmsu/lpext.dll?f=templates&fn=main-h.htm&2.0
http://www.conwaygreene.com/nmsu/lpext.dll?f=templates&fn=main-h.htm&2.0
http://www.zenncarsabq.com/pdf/HB0294%20as%20introduced.pdf

New York: (New York Vehicle and Traffic Law 121-f)
http://law.justia.com/newyork/codes/vehicle-traffic/vat0121-f_121-f.html

North Carolina: (North Carolina General Statutes § 20-125)
http://www.ncga.state.nc.us/sessions/2001/bills/house/pdf/h1052v5.pdf
http://law.onecle.com/north-carolina/20-motor-vehicles/20-121.1.html
http://www.ncga.state.nc.us/Sessions/2009/Bills/House/HTML/H1257v0.html

North Dakota: (North Dakota Century Code 39-29.1 and 57-40.3-01)
http://www.legis.nd.gov/cencode/t39c291.pdf
http://www.legis.nd.gov/cencode/t57c403.pdf

Oklahoma: (Oklahoma Statutes 47-1-134.1, 47-11-805.1, 47-1102, SENATE BILL 1384, JANUARY 9, 2008, HOUSE BILL 2695, JANUARY 17, 2008)
http://law.justia.com/oklahoma/codes/os47.html
http://webserver1.lsb.state.ok.us/2007-08bills/SB/SB1384_ENR.RTF
http://webserver1.lsb.state.ok.us/2007-08bills/HB/HB2695_ENR.RTF

Oregon: (Oregon Revised Statutes 801.331, 801.341, 811.512, 811.513)
https://www.oregonlaws.org/ors/801.331
http://www.lawserver.com/law/state/oregon/or-statutes/oregon_statutes_801-341
https://www.oregonlaws.org/ors/811.512
https://www.oregonlaws.org/ors/811.513

Rhode Island: (Rhode Island Code 31-19.4-1)
http://www.rilin.state.ri.us/statutes/title31/31-19.4/31-19.4-1.HTM

South Carolina: (South Carolina Code of Laws 56-1-10, 56-2-100 to 56-2-130, and 56-5-820)
http://www.scstatehouse.gov/code/t56c001.htm
http://www.scstatehouse.gov/code/t56c002.htm
http://www.scstatehouse.gov/code/t56c005.htm
www.scstatehouse.gov/sess118_2009-2010/bills/419.docx

South Dakota: (South Dakota Legislature 32-3-71, 32-5-152, 32-25-27, 32-6B-12.1, 32-35-125, 32-12-4.8, 32-3-1)
http://legis.state.sd.us/statutes/DisplayStatute.aspx?Statute=32-3-1&Type=Statute
http://legis.state.sd.us/statutes/DisplayStatute.aspx?Statute=32-3-71&Type=Statute
http://legis.state.sd.us/statutes/DisplayStatute.aspx?Statute=32-5-152&Type=Statute
http://legis.state.sd.us/statutes/DisplayStatute.aspx?Statute=32-25-27&Type=Statute
http://legis.state.sd.us/statutes/DisplayStatute.aspx?Statute=32-6B-12.1&Type=Statute
http://legis.state.sd.us/statutes/DisplayStatute.aspx?Statute=32-35-125&Type=Statute
http://legis.state.sd.us/statutes/DisplayStatute.aspx?Statute=32-12-4.8&Type=Statute

Tennessee: (Tennessee Code 55-8-101 and 55-8-191)
http://state.tn.us/sos/acts/105/pub/pc0959.pdf
http://www.tn.gov/revenue/notices/titlereg/08-20.pdf
http://www.tn.gov/revenue/forms/titlereg/f1314301Fill-in.pdf

Texas: (Texas Statutes, Transportation Code 551.301-551.303)
http://www.statutes.legis.state.tx.us/Docs/TN/htm/TN.551.htm#551.301

Utah: (Utah legislature 41-6a-1508)
http://le.utah.gov/~2010/bills/hbillamd/hb0238.htm

Vermont: (Vermont Statutes Title 23, Chapter 1, Section 4, and Chapter 13, Sections 1007a and 1043)
http://www.leg.state.vt.us/statutes/fullsection.cfm?Title=23&Chapter=001&Section=00004
http://www.leg.state.vt.us/statutes/fullsection.cfm?Title=23&Chapter=013&Section=01007a
http://www.leg.state.vt.us/statutes/fullsection.cfm?Title=23&Chapter=013&Section=01043

Virginia: (Virginia Code 46.2-100, 46.2-908.2, and 46.2-908.3)
http://www.vsp.state.va.us/downloads/Golf_Carts_and_Utility_Vehicles_2008.pdf
http://leg1.state.va.us/cgi-bin/legp504.exe?000+cod+46.2-908.2
http://leg1.state.va.us/cgi-bin/legp504.exe?000+cod+46.2-908.3

Washington: (Revised Code of Washington 46.04.295, 46.04.357 and 46.61.723-46.61.725)
http://apps.leg.wa.gov/RCW/default.aspx?cite=46.04.357
http://apps.leg.wa.gov/documents/billdocs/2009-10/Pdf/Bill%20Reports/Senate/6207%20SBR%20TRAN%2010.pdf
http://apps.leg.wa.gov/rcw/default.aspx?cite=46.04.295
http://apps.leg.wa.gov/rcw/default.aspx?cite=46.61.723
http://apps.leg.wa.gov/rcw/default.aspx?cite=46.61.725

West Virginia: (Reference West Virginia Code 17A-3-1, 17A-3-2)
http://www.legis.state.wv.us/WVCODE/17a/code/WVC%2017%20A-%20%201%20%20-%20%20%201%20%20.htm
http://www.legis.state.wv.us/WVCODE/17a/code/WVC%2017%20A-%20%203%20%20-%20%20%202%20%20.htm

Wisconsin: (Wisconsin Statutes 349.26)
http://www.legis.state.wi.us/2009/data/SB321-ASA1.pdf

Wyoming: (Wyoming Statutes 31-5-1701, 31-1-101)
http://legisweb.state.wy.us/2006/Introduced/SF0078.pdf

10.0 APPENDIX B TABLE OF MANUFACTURERS

Manufacturer	Model/Year	no of passenger	no of doors	Seatbelts positions	curb weight (lb)	GVW (lb)	Payload Capacity (lb)	length (in)	Height (in)	Width (in)	Wheelbase (in)	range (miles)	Maximum Speed (mph)
Ford Th!nk	Ford Th!nk Neighbor/02	4	none	4	Design 1392 Delivered 1431	2300	899	114.1	67.7	56.4	77.9	38.6	25
Frazer-Nash	Fazer-Nash CityCar/01	4	4	4	Design 1954 Delivered 1961	2593	640	122	62	66	86.6	30.9	24.6
GEM	GEM e4/05	4	2	4	Design 1271 Delivered 1539	2100	561	131.1	69.1	57.7	102.1	40.5	24
Miles Electric Vehicles	Miles ZX40S-AD/08	4	4	4	Design 2350 Delivered 2365	2998	633	134	67	58	92.9	63	24.9
Columbia Parcar	Parcar 4-pasenger/02	4	none	4	Design 1362 Delivered 1452	2460	1100	119	74	44.3	89	47.1	23.3
ZENN Motor company	ZENN 2 passenger/08	2	2	2	Design 1200 Delivered 1404	1807	403	120.8	55.9	58	81.8	64.6	25
Dynasty electric vehicles ltd	IT' Sport	4	4	4	1450	2495	1150	140	63	60	90	30.4	24
Dynasty electric vehicles ltd	IT' Tropic	4	none	4	1450	2495	1045	140	63	60	90	30.4	24
GEM	2009 Peapod NEV	4	4	4	1290	2200	910	143.6	70.5	56.5	102	30	25
ZAP Truck (Utility vehicle)	ZAPTRUCK XL/09	2	2	-	-	2998	1900	159	76	60	82.5	30	25
Ruff and Tuff electric vehicles	NEV 4	4	none	-	1385	-	1000	132	73	50	102	-	25



OTREC
OREGON TRANSPORTATION RESEARCH AND EDUCATION CONSORTIUM

P.O. Box 751
Portland, OR 97207

OTREC is dedicated to stimulating and conducting collaborative multi-disciplinary research on multi-modal surface transportation issues, educating a diverse array of current practitioners and future leaders in the transportation field, and encouraging implementation of relevant research results.