


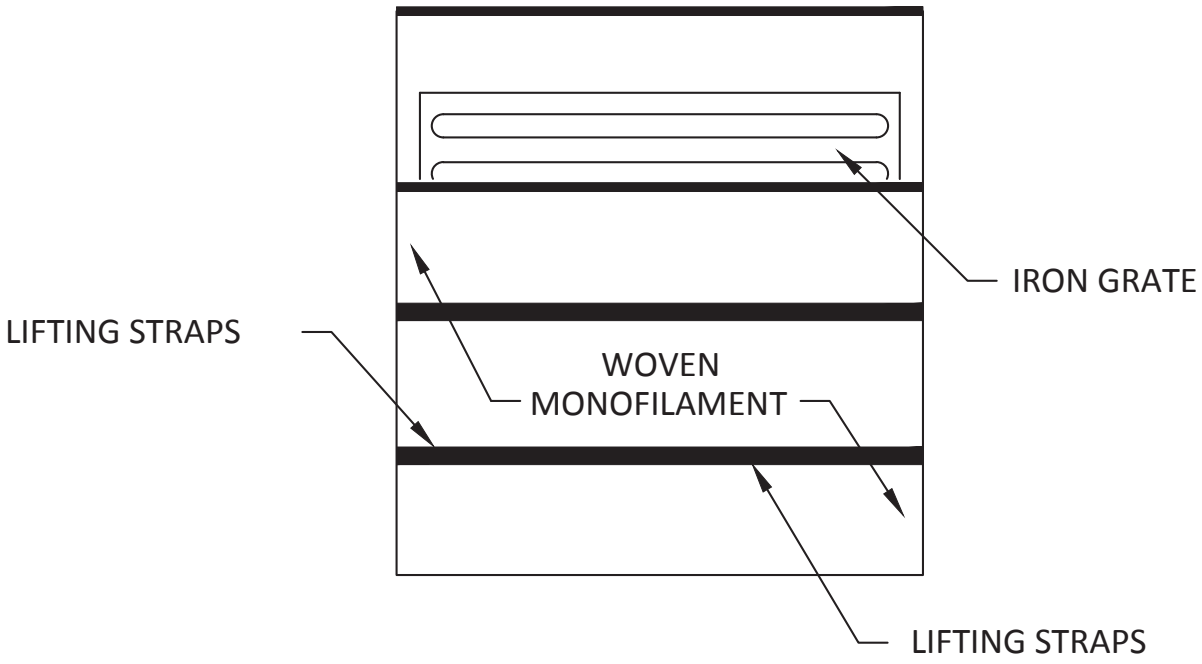

CATCH BASIN SEDIMENT FILTER

MAINTENANCE: REMOVE DRIED SEDIMENT FROM SURFACE OF UNIT WITH A STIFF BRISTLE BROOM OR SQUARE POINT SHOVEL. REMOVE FINE MATERIAL FROM INSIDE ENVELOPE AS NEEDED.

TO INSPECT CATCH BASIN: REMOVE UNIT WITH GRATE INSIDE, INSPECT CATCH BASIN AND REPLACE UNIT.

EST 1808 CITY OF DELAWARE OHIO Public Works Department	STANDARD DETAIL CATCH BASIN SEDIMENT FILTER	EROSION ERSD-1.0 Rev. 12/31/2018