
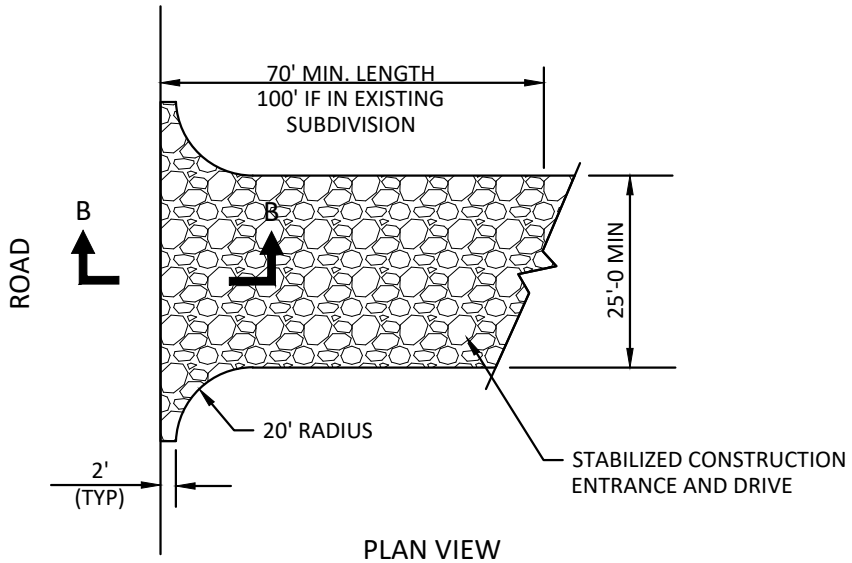


PLAN VIEW

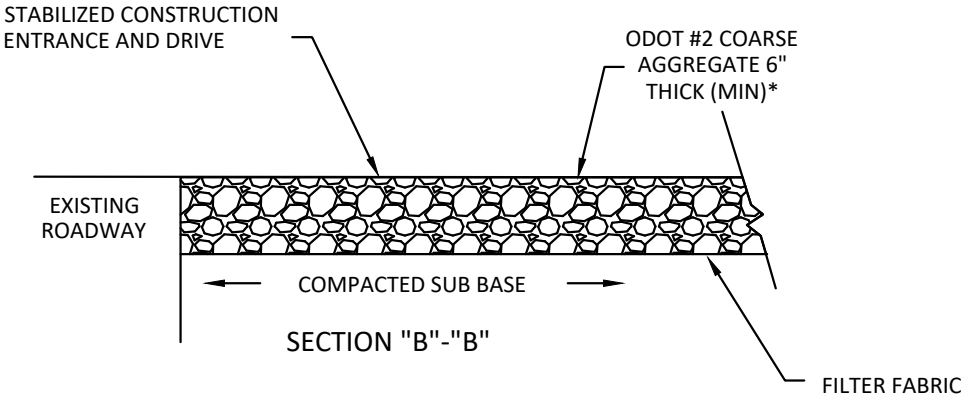

SECTION "B"-"B"

(STAGING AREA PAVEMENT
COMPOSITION 6" THICK)

STABILIZED CONSTRUCTION ENTRANCE DETAIL

1. THE EARTHWORK CONTRACTOR SHALL INSTALL AND MAINTAIN THE CONSTRUCTION ENTRANCE AND STAGING AREA. THE EARTHWORK CONTRACTOR SHALL PERIODICALLY ADD CLEAN STONE AND MAINTAIN THE GRAVEL EDGES FOR THE DURATION OF THE PROJECT. WHEN THE CONSTRUCTION ENTRANCE AND DRIVE ARE NO LONGER NEEDED, THE EARTHWORK CONTRACTOR SHALL REMOVE THE GRAVEL AND RESTORE THE GROUND TO ITS ORIGINAL CONDITION.
2. A 304 STONE CAP MAY NOT BE USED IN THE FIRST 70' OFF OF THE ROADWAY BUT CAN BE USED PAST THIS POINT.
3. FILTER FABRIC IS REQUIRED FOR ALL APPLICATIONS.
4. GRADE DRIVE TO DRAIN AND INSTALL AGGREGATE DIVERSION AS NEEDED TO DIVERT RUNOFF FROM THE ENTRANCE.
5. INSTALL A DRIVE CULVERT AT THE ENTRANCE IF NEEDED TO MAINTAIN ROADSIDE DRAINAGE.

* WHEN A CONSTRUCTION ENTRANCE IS INSTALLED ADJACENT TO A PUBLIC ROAD WITH A POSTED SPEED LIMIT OVER 35 MPH, THE FIRST 70' OF THE ENTRANCE SHALL BE PAVED WITH 3" OF ITEM 301 ASPHALT CONCRETE.

EST 1808 CITY OF DELAWARE OHIO Public Works Department	STANDARD DETAIL STANDARD CONSTRUCTION ENTRANCE	EROSION ERSD-3.0 9/23/2025